



## SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder

### RF Cable Assemblies Technical Data Sheet



PE3C3408LF

#### Configuration

- Connector 1: SSMB Plug
- Connector 2: BNC Male
- Cable Type: RG316

#### Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

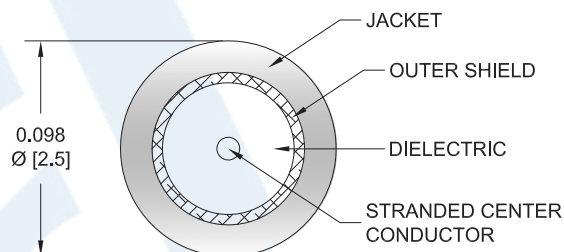

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3C3408LF SSMB plug to BNC male cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SSMB to BNC cable assembly has a plug to male gender configuration with 50 ohm flexible RG316 coax. The PE3C3408LF SSMB plug to BNC male cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.5:1	
Velocity of Propagation		69		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
DC Resistance Inner Conductor		8.41 [27.59]		$\Omega$ /1000ft [ $\Omega$ /Km]
Operating Voltage (AC)			250	Vrms
Jacket Spark			2,000	Vrms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder PE3C3408LF](#)



SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C3408LF

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	3	GHz
Insertion Loss (Max.)	0.16	0.23	0.38	0.53	0.58	dB/ft
	0.52	0.75	1.25	1.74	1.9	dB/m

**Electrical Specification Notes:**

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.2dB of connector loss.

**Mechanical Specifications**

**Cable Assembly**

Diameter 0.57 in [14.48 mm]

**Cable**

Cable Type RG316  
 Impedance 50 Ohms  
 Inner Conductor Type Stranded  
 Inner Conductor Material and Plating Copper Clad Steel, Silver  
 Dielectric Type PTFE  
 Number of Shields 1  
 Shield Layer 1 Silver Plated Copper Braid  
 Jacket Material FEP, Tan  
 Jacket Diameter 0.102 in [2.59 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder PE3C3408LF](#)



SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C3408LF

**Connectors**

Description	Connector 1	Connector 2
Type	SSMB Plug	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	50µ in. minimum
Dielectric Type	PTFE	Teflon
Outer Conductor Material and Plating	Beryllium Copper, Gold	
Outer Conductor Plating Specification	30 µin minimum	
Body Material and Plating	Brass, Gold	Brass, Nickel
Body Plating Specification	30 µin minimum	100µ in. minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100µ in. minimum

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.

**Environmental Specifications**

**Temperature**

Operating Range -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder PE3C3408LF](#)




SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C3408LF

Typical Performance Data

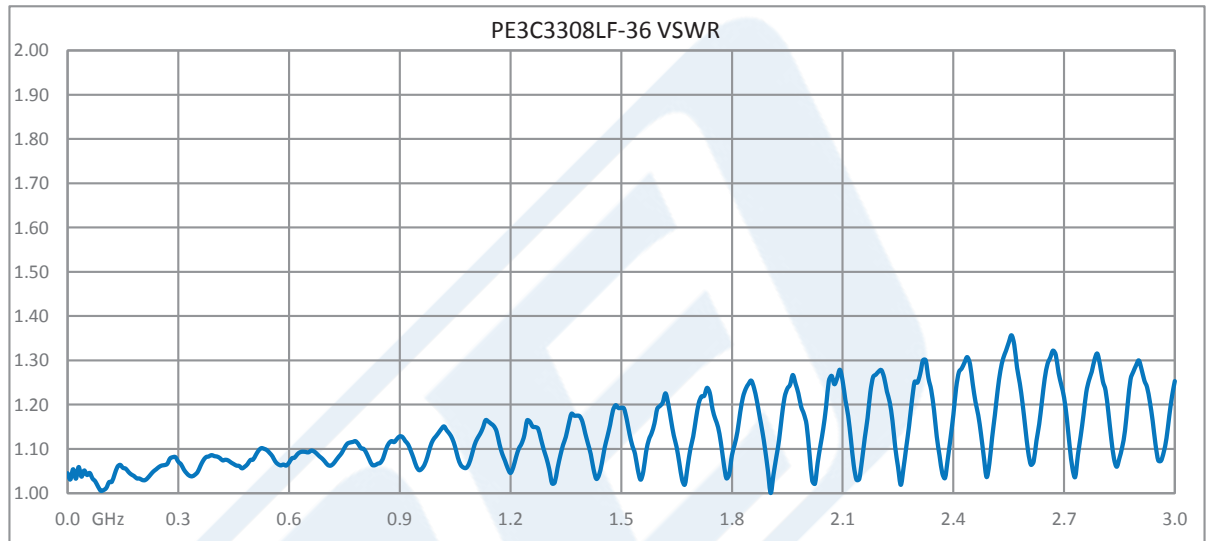

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder PE3C3408LF](#)



SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C3408LF

**How to Order**

Part Number Configuration:

**PE3C3408LF - xx uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C3408LF-12 = 12 inches long cable  
PE3C3408LF-100cm = 100 cm long cable

SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder PE3C3408LF](https://www.pasternack.com/ssmb-plug-bnc-male-rg316u-cable-assembly-pe3c3408lf-p.aspx)

URL: <https://www.pasternack.com/ssmb-plug-bnc-male-rg316u-cable-assembly-pe3c3408lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3C3408LF CAD Drawing

SSMB Plug to BNC Male Cable Using RG316 Coax , LF Solder

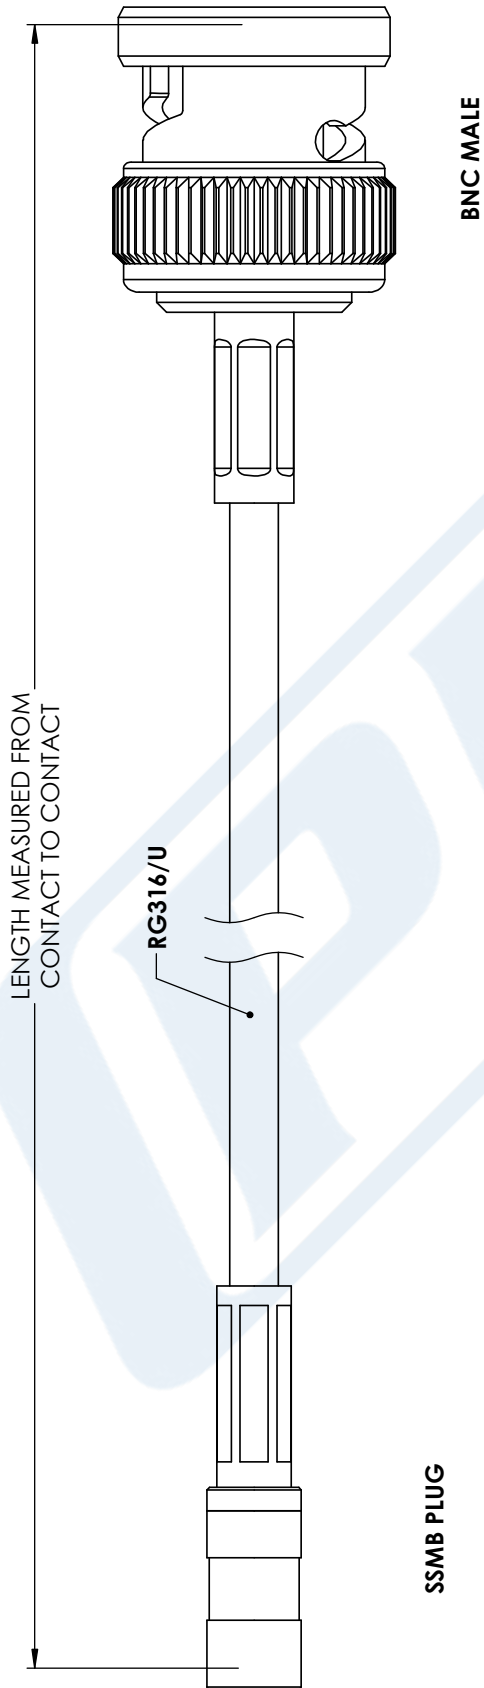

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<p><b>PASTERNAK</b> THE ENGINEER'S RF SOURCE</p> <p>Pasternack Enterprises, Inc. P.O. Box 16759   Irvine   CA   92623</p> <p><b>Phone:</b> (949) 261-1920   <b>Fax:</b> (949) 261-7451 <b>Website:</b> www.pasternack.com   <b>E-Mail:</b> sales@pasternack.com</p>	<p>DWG TITLE</p> <p>PE3C3408LF</p>	<p>NOTES:</p> <ol style="list-style-type: none"> <li>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.</li> <li>ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME</li> <li>DIMENSIONS ARE IN INCHES [mm].</li> </ol>		
	<p>CAGE CODE</p> <p>53919</p>	<p>CAD FILE</p> <p>10/16/18</p>	<p>SCALE</p> <p>N/A</p>	<p>SIZE</p> <p>A</p>