

30 dB Fixed Attenuator, SMA Male to SMA Female Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 18 GHz



### **RF Fixed Attenuators Technical Data Sheet**

### PE7427-30

# Features

- Bidirectional
- DC to 18 GHz Frequency Range
- Attenuation 30±1.5 dB

#### **Applications**

- Instrumentation
- Precision measurements

- Max Power 50 Watts (CW)
- VSWR < 1.35:1</li>
- Prototyping and characterization
- Production systems

#### Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest instock varieties and ships them same day. The 30 dB Fixed Attenuator PE7427-30 is rated to 50 Watts and operates from DC to 18 GHz. The versatile coaxial package uses SMA male to SMA female connectors and is also REACH and RoHS compliant. The Black Anodized Aluminum Heatsink body allows for efficient heat dissipation under high power usage conditions. Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuators pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjustion the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 30 dB Fixed Attenuator PE7427-30 is rated to 50 Watts and operates from DC to 18 GHz. The versatile coaxial package uses SMA male to SMA female connectors and is also REACH and RoHS compliant. The Black Anodized Aluminum Heatsink body allows for efficient heat dissipation under high power usage conditions.

#### **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
Nominal Attenuation		30		dB
Attenuation Accuracy			1.5	dB
VSWR			1.35:1	
Input Power, CW			50	Watts

rated at +25°C, derated linearly to 5W at +125°C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 30 dB Fixed Attenuator, SMA Male to SMA Female Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 18 GHz PE7427-30

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com



PE7427-30

30 dB Fixed Attenuator, SMA Male to SMA Female Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 18 GHz

## **RF Fixed Attenuators Technical Data Sheet**

Input Power, Peak		1 kWatts	
5µs pulse, 2.5% duty cycle			
Electrical Specification Notes: Values at +25°C, sea level.			
echanical Specifications			
Size	4 70 in [	101 41 mm]	
Length Width/Diameter		4.78 in [121.41 mm] 1.5 in [38.1 mm]	
Weight Body Material and Plating	0.3837 lbs [174.04 g] Black Anodized Aluminum Heatsink		
Configuration			
Design Package Style	Fixed, Bidirectional Connectorized Module		
Connectors			
Description	Connector 1	Connector 2	
Туре	SMA Male	SMA Female	
Connector Specification	MIL-STD-348A	MIL-STD-348A	
Contact Material and Plating	Passivated Stainless Steel	Beryllium Copper, Gold	
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel	
nvironmental Specifications Temperature Operating Range	-55 to +*	125 deg C	
ompliance Certifications (see prod	uct page for current document)		
otted and Other Data			
Notes:			

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 30 dB Fixed Attenuator, SMA Male to SMA Female Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 18 GHz PE7427-30

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com





30 dB Fixed Attenuator, SMA Male to SMA Female Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 18 GHz

### **RF Fixed Attenuators Technical Data Sheet**

### PE7427-30


30 dB Fixed Attenuator, SMA Male to SMA Female Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 30 dB Fixed Attenuator, SMA Male to SMA Female Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 18 GHz PE7427-30

URL: https://www.pasternack.com/30db-fixed-sma-male-sma-female-50-watts-attenuator-pe7427-30-p.aspx

PE7427-30 CAD Drawing

30 dB Fixed Attenuator, SMA Male to SMA Female Black Anodized Aluminum Heatsink Body Rated to 50 Watts Up to 18 GHz

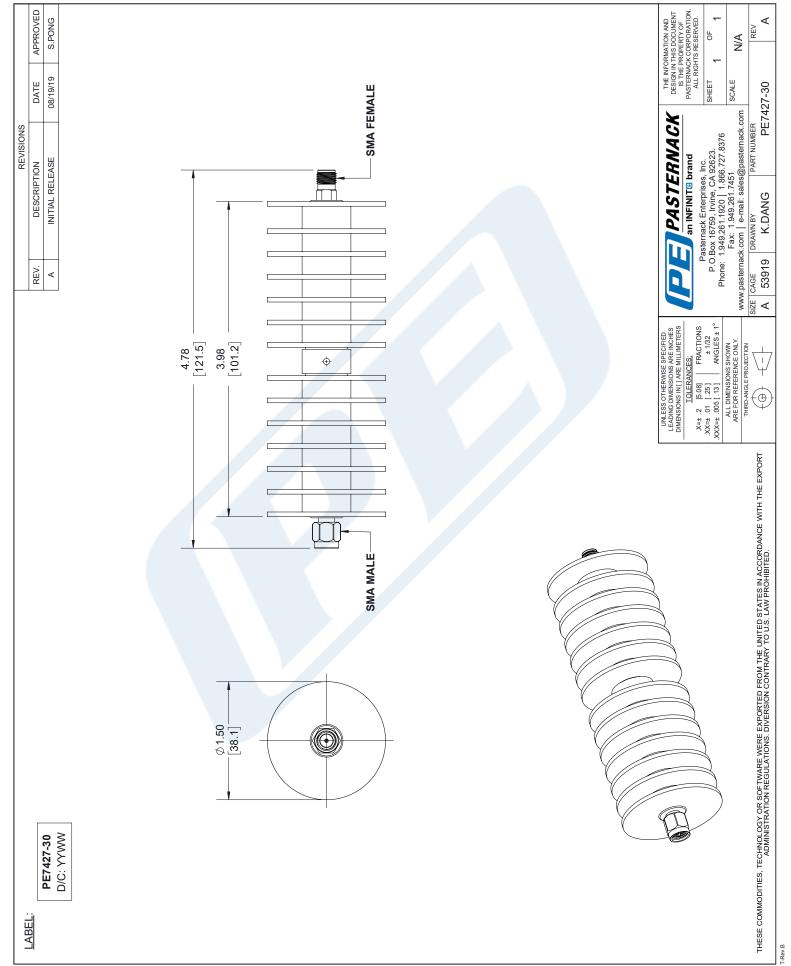

4