



SMA Male Right Angle to SMB Plug Right Angle Cable Using PE-SR405FL Coax

RF Cable Assemblies Technical Data Sheet


PE3W01739

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMB Plug Right Angle
- Cable Type: PE-SR405FL

Features

- Max Frequency 6 GHz
- 69.5% Phase Velocity

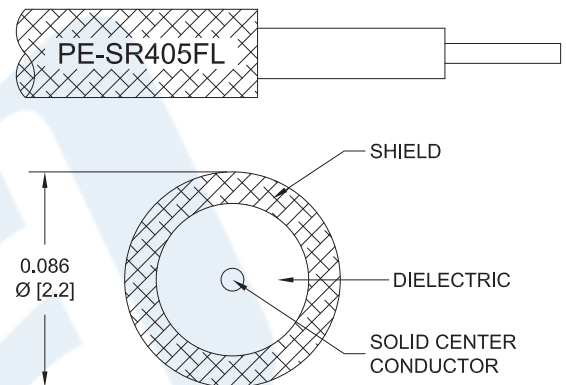

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W01739 SMA male right angle to SMB plug right angle cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMB cable assembly has a male to plug gender configuration with 50 ohm formable PE-SR405FL coax. The PE3W01739 SMA male to SMB plug cable assembly operates to 6 GHz. The right angle SMA and right angle SMB interfaces on the PE-SR405FL cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω /1000ft [Ω /Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ω /1000ft [Ω /Km]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMB Plug Right Angle Cable Using PE-SR405FL Coax PE3W01739](#)



SMA Male Right Angle to SMB Plug Right Angle Cable Using PE-SR405FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W01739

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	6	GHz
Insertion Loss (Typ.)	0.15	0.23	0.31	0.47	0.6	dB/ft
	0.49	0.75	1.02	1.54	1.97	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.4dB connector loss.

Mechanical Specifications

Cable Assembly

Diameter 0.315 in [8 mm]

Cable

Cable Type PE-SR405FL
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Tinned Copper Braid

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMB Plug Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Gold
Contact Plating Specification	2 μ in. minimum	
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	1 μ in. minimum	
Coupling Nut Material and Plating	Passivated Stainless Steel	
Hex Size	5/16 in.	
Torque	8 in-lbs [0.9 Nm]	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8$ ", whichever is greater.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMB Plug Right Angle Cable Using PE-SR405FL Coax PE3W01739](#)



SMA Male Right Angle to SMB Plug Right Angle
Cable Using PE-SR405FL Coax

RF Cable Assemblies Technical Data Sheet


PE3W01739

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

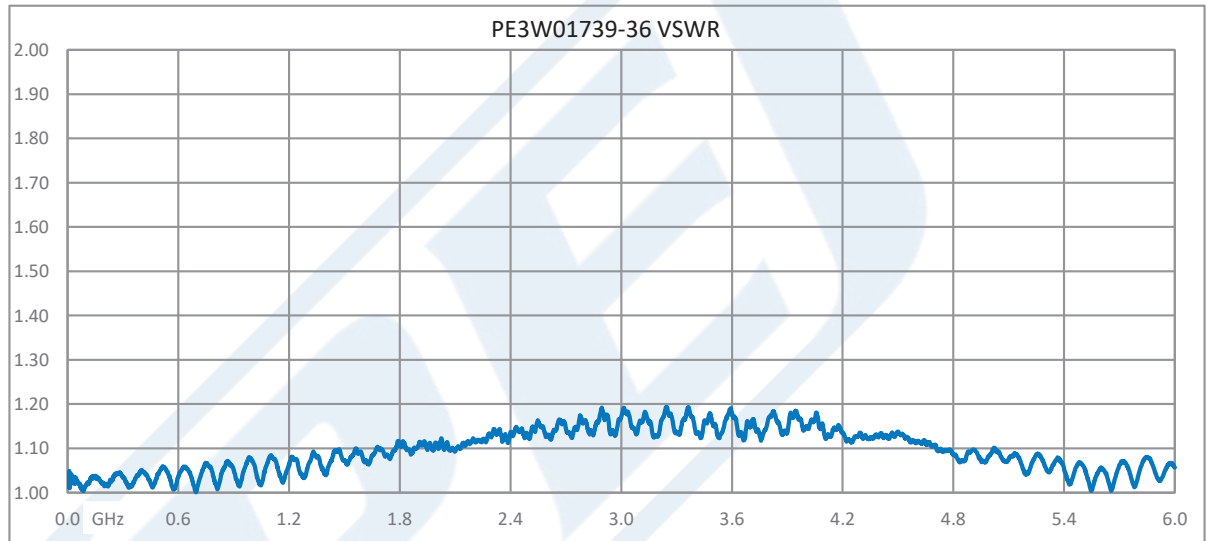

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMB Plug Right Angle Cable Using PE-SR405FL Coax PE3W01739](#)



SMA Male Right Angle to SMB Plug Right Angle Cable Using PE-SR405FL Coax

RF Cable Assemblies Technical Data Sheet

PE3W01739

How to Order

Part Number Configuration:

PE3W01739

- **xx**

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE3W01739-12 = 12 inches long cable
PE3W01739-100cm = 100 cm long cable

SMA Male Right Angle to SMB Plug Right Angle Cable Using PE-SR405FL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMB Plug Right Angle Cable Using PE-SR405FL Coax PE3W01739](https://www.pasternack.com/sma-male-smb-plug-pe-sr405fl-cable-assembly-pe3w01739-p.aspx)

URL: <https://www.pasternack.com/sma-male-smb-plug-pe-sr405fl-cable-assembly-pe3w01739-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W01739 CAD Drawing

SMA Male Right Angle to SMB Plug Right Angle Cable Using PE-SR405FL Coax

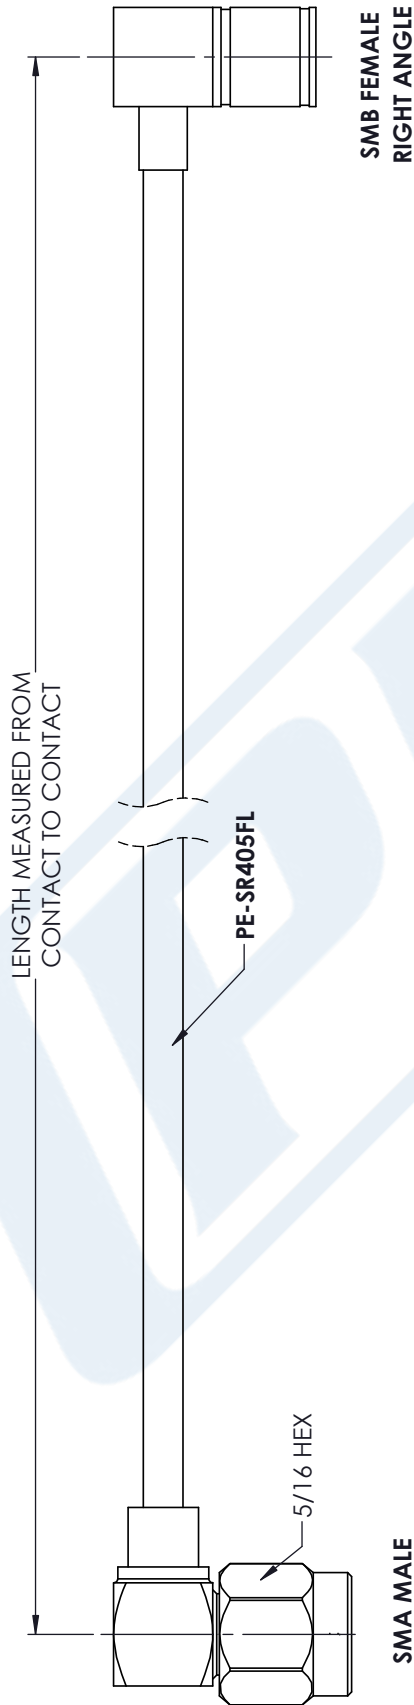

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

PASTERNAK
THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE
 PE3W01739

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 10/23/18

SCALE N/A

SIZE A
 CN2379