



# High Power 150 Watt RF Load Up to 3 GHz with SMA Female Chem Film Plated Aluminum

## RF Terminations Technical Data Sheet

PE6TR1003

### Features

- DC to 3 GHz Frequency Range
- VSWR 1.3:1 Max
- Max Power 150 Watt (CW)
- SMA Female Coaxial Interface
- Designed for Mounting to Heat Sink

### Applications

- Wireless
- Radar Systems
- Commercial and Military Communication
- SatCom
- Test and Measurement

### Description

Pasternack's PE6TR1003 is an RF termination (also called RF load or dummy load) that operates from DC to 3 GHz and handles up to 150 Watt (CW). Our SMA Connectorized termination / load has a Female gender. PE6TR1003 SMA type load termination offers 1.3:1 max VSWR.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination are commonly used to terminate devices such as couplers, circulators, switches and are great for diverting thermal energy away from other system components by mounting to a heat sink. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
Impedance		50		Ohms
VSWR			1.3:1	
Input Power (CW)			150	Watts

### Mechanical Specifications

#### Size

Length	1.63 in [41.4 mm]
Width	2 in [50.8 mm]
Height	1.02 in [25.91 mm]
Weight	0.201 lbs [91.17 g]

#### Configuration

Connector	SMA Female
-----------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Power 150 Watt RF Load Up to 3 GHz with SMA Female Chem Film Plated Aluminum PE6TR1003](#)



High Power 150 Watt RF Load Up to 3 GHz with  
SMA Female Chem Film Plated Aluminum

RF Terminations Technical Data Sheet

PE6TR1003

**Material Specifications**

Description	Material	Plating
Body	Passivated Stainless Steel	
Housing	Aluminum	Chem Film

**Environmental Specifications**

**Temperature**

Operating Range -55 to +100 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Power 150 Watt RF Load Up to 3 GHz with SMA Female Chem Film Plated Aluminum PE6TR1003](#)



High Power 150 Watt RF Load Up to 3 GHz with  
SMA Female Chem Film Plated Aluminum

Typical Performance Data

Power Derating Curve

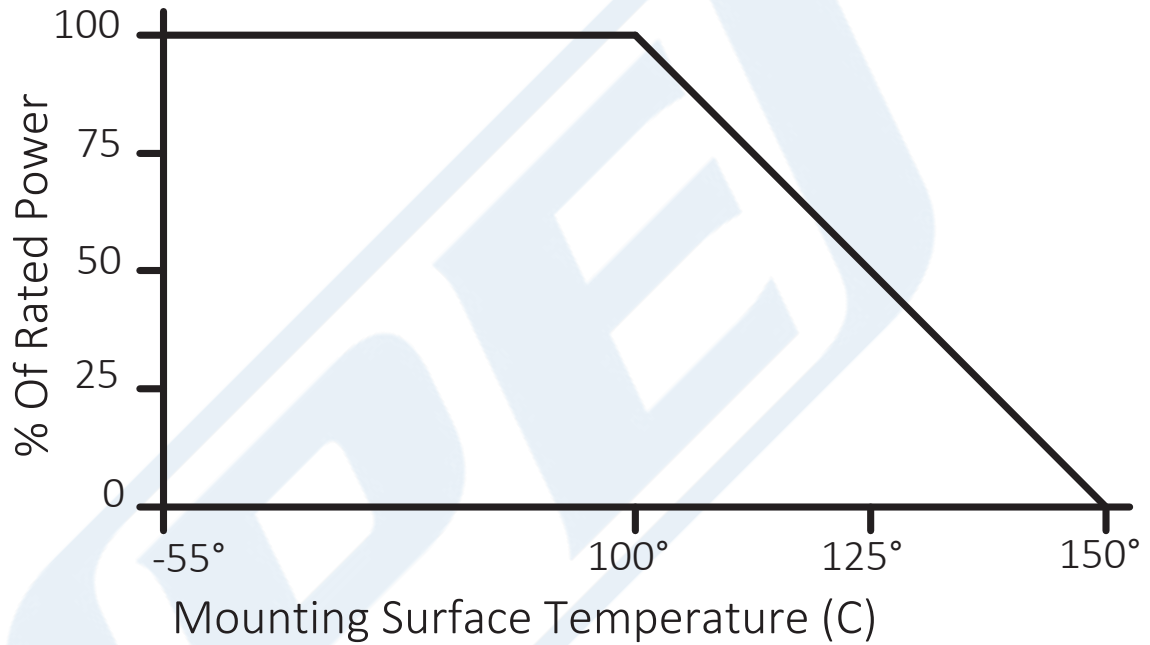


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Power 150 Watt RF Load Up to 3 GHz with SMA Female Chem Film Plated Aluminum PE6TR1003](#)



High Power 150 Watt RF Load Up to 3 GHz with  
SMA Female Chem Film Plated Aluminum

### Power Derating Curve

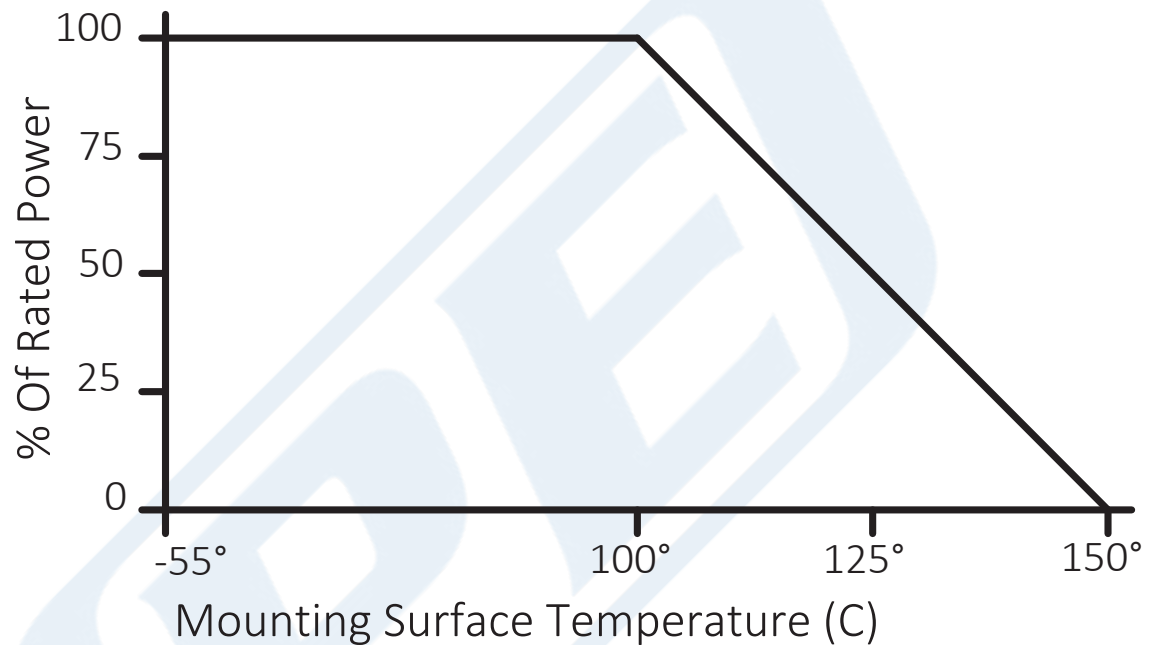

High Power 150 Watt RF Load Up to 3 GHz with SMA Female Chem Film Plated Aluminum from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [High Power 150 Watt RF Load Up to 3 GHz with SMA Female Chem Film Plated Aluminum PE6TR1003](https://www.pasternack.com/150-watts-sma-female-rf-load-up-to-3-ghz-precision-pe6tr1003-p.aspx)

URL: <https://www.pasternack.com/150-watts-sma-female-rf-load-up-to-3-ghz-precision-pe6tr1003-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE6TR1003 CAD Drawing

High Power 150 Watt RF Load Up to 3 GHz with SMA Female Chem Film Plated Aluminum

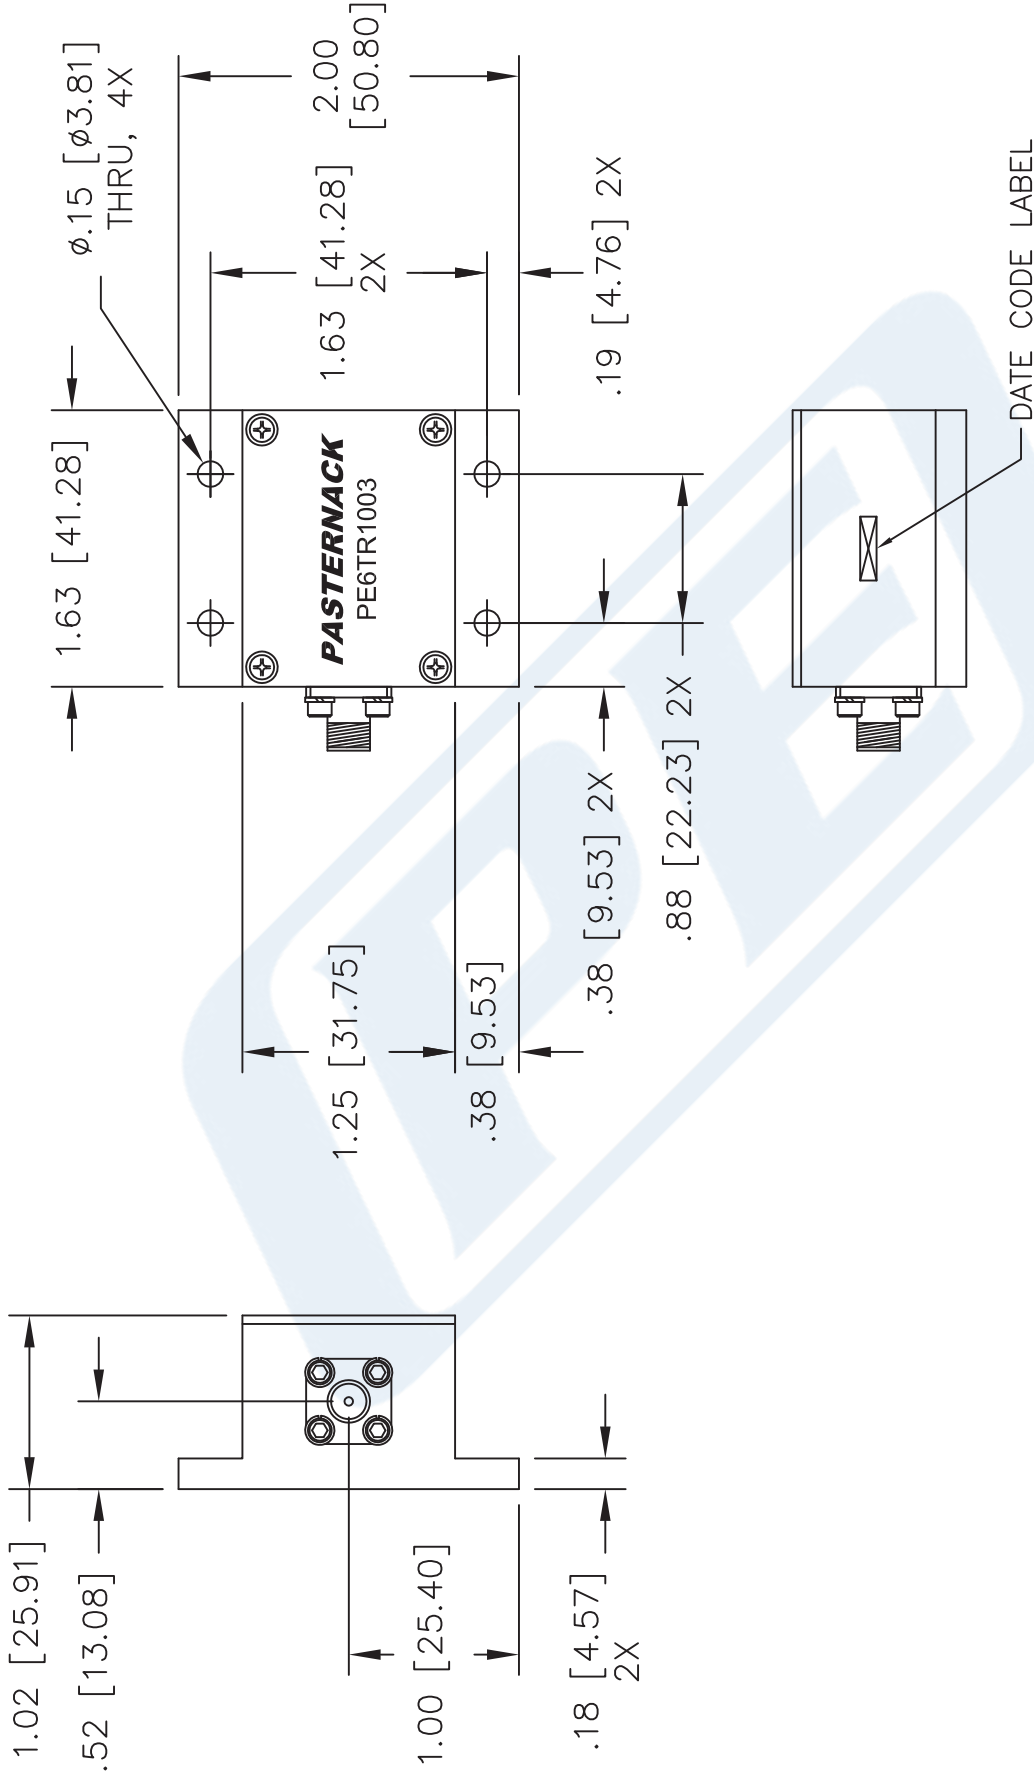

TOLERANCE .XX ±.02  
.XXX ±.010  
ANG. ±1/2°

\* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

<p><b>PE PASTERNAK®</b> THE ENGINEER'S RF SOURCE Pasternack Enterprises, Inc. P.O. Box 16759   Irvine   CA   92623 Phone: (949) 261-1920   Fax: (949) 261-7451 Website: www.pasternack.com   E-Mail: sales@pasternack.com</p>		<p>DWG TITLE <b>PE6TR1003</b></p>		<p>NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].</p>	
<p>FSCM NO. 53919</p>		<p>CAD FILE 040915</p>		<p>SCALE N/A</p>	
<p>SIZE A</p>		<p>2233</p>		<p></p>	