



## 24 Pin DIP Packaged Noise Source Module, Output Pout of -5 dBm, +15 VDC, 10 MHz to 3 GHz

### Noise Generators Technical Data Sheet

PE85NS5001

#### Features

- Industry Standard 24 Pin DIP Packaged Noise Source module
- Frequency Range: 10 MHz to 3000 MHz
- Noise Output Level: -5 dBm
- Internal Filtering to limit bandwidth
- Maximum Flatness:  $\pm 2$  dB
- White Gaussian Noise Output
- Minimum power level -100 dBm/Hz
- DC Voltage: +15 Vdc
- -55°C to +125°C Operating Temperature
- Crest Factor: 5:1

#### Applications

- Noise Figure Test & Measurement
- Built-In Test Equipment
- Dithering for Increased Dynamic Range for A/D Converters
- Source for Bit Error Rate Testing

#### Description

The PE85NS5001 is a dual in-line packaged (DIP) noise source module which operates over a frequency range from 10 MHz to 3 GHz. The industry standard 24 pin DIP package is particularly useful in circuit board applications used for built-in test equipment, dithering for increased dynamic range of A/D converters, and as a source for bit error rate testing. The design utilizes internal filtering to limit bandwidth and operates at +15 Vdc. Noise Output level is -5 dBm with maximum flatness of  $\pm 2$  dB. The output White Gaussian Noise has a minimum power level of -100 dBm/Hz and a Crest Factor of 5:1. Operating temperature range is -55°C to +125°C with a temperature coefficient of 0.025 dB/°C.

#### Electrical Specifications

##### RF Characteristics

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.01		3	GHz
Impedance		50		Ohms
Flatness			$\pm 2$	dB
Output Variation vs Temperature		0.025		dB/deg C
Output Power		-5		dBm
Output Power Spectral Density		-100		dBm/Hz
Bias Voltage 1		15		Volts
Input Current 1			100	mA
Crest Factor		5:1		

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [24 Pin DIP Packaged Noise Source Module, Output Pout of -5 dBm, +15 VDC, 10 MHz to 3 GHz PE85NS5001](#)



24 Pin DIP Packaged Noise Source Module, Output Pout of -5 dBm, +15 VDC, 10 MHz to 3 GHz

## Noise Generators Technical Data Sheet

PE85NS5001

### Mechanical Specifications

#### Size

Length	1.38 in [35.05 mm]
Width/Dia.	0.795 in [20.19 mm]
Height	0.7 in [17.78 mm]

Package Type	Drop In
--------------	---------

### Environmental Specifications

#### Temperature

Operating Range	-55 to +125 °C
Storage Range	-65 to +150 °C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [24 Pin DIP Packaged Noise Source Module, Output Pout of -5 dBm, +15 VDC, 10 MHz to 3 GHz PE85NS5001](#)




24 Pin DIP Packaged Noise Source Module, Output Pout of -5 dBm, +15 VDC, 10 MHz to 3 GHz

Noise Generators Technical Data Sheet

PE85NS5001

Typical Performance Data

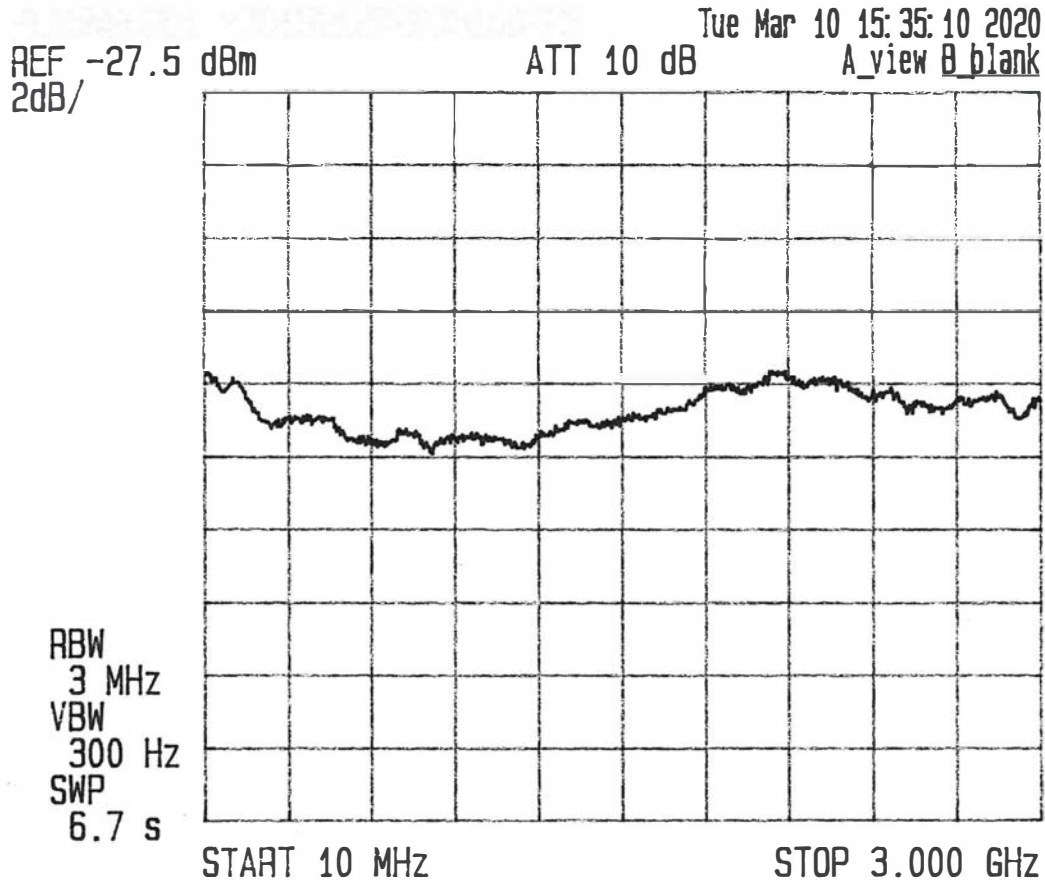

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [24 Pin DIP Packaged Noise Source Module, Output Pout of -5 dBm, +15 VDC, 10 MHz to 3 GHz PE85NS5001](#)



## 24 Pin DIP Packaged Noise Source Module, Output Pout of -5 dBm, +15 VDC, 10 MHz to 3 GHz

### Noise Generators Technical Data Sheet

PE85NS5001

24 Pin DIP Packaged Noise Source Module, Output Pout of -5 dBm, +15 VDC, 10 MHz to 3 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [24 Pin DIP Packaged Noise Source Module, Output Pout of -5 dBm, +15 VDC, 10 MHz to 3 GHz PE85NS5001](https://www.pasternack.com/noise-source-pout-negative-5-dbm-3-ghz-pe85ns5001-p.aspx)

URL: <https://www.pasternack.com/noise-source-pout-negative-5-dbm-3-ghz-pe85ns5001-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE85NS5001 CAD Drawing

24 Pin DIP Packaged Noise Source Module, Output Pout  
of -5 dBm, +15 VDC, 10 MHz to 3 GHz

## REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/18/2020	TGALLA
B	ADDED PIN DESCRIPTIONS	08/11/2020	TGALLA

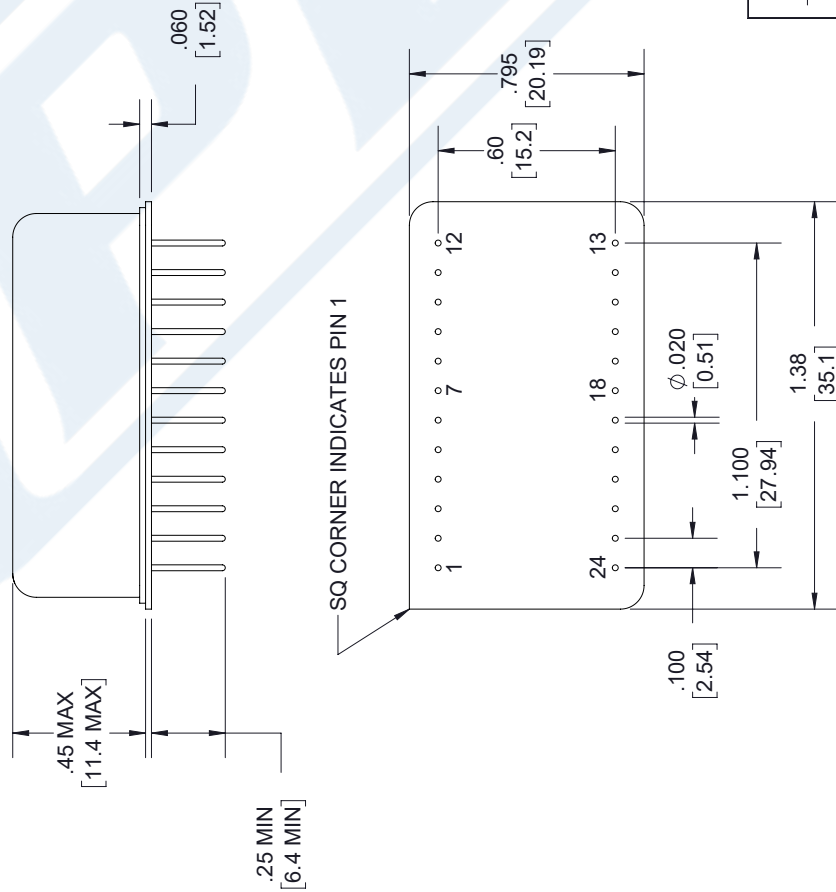

**B**  
24 PIN  
Pin 18 = +VCC  
Pin 13 = Output  
Pin 7 = TTL Option  
All other Pins Ground

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5.08]    FRACTIONS ± 1/32  
 .XX = ±.02 [.51]    ANGLES ± 1°  
 .XXX = ±.005 [.13]  
 CABLE LENGTH (L) TOLERANCES:  
 L ≤ 12 [305] = +1 [25] / -0  
 12 [305] < L ≤ 60 [1524] = +2 [51] / -0  
 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0  
 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0  
 300 [7620] < L = +5%L / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.



THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV B



**PASTERNAK**  
an INFINITI<sup>®</sup> brand

Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: www.pasternack.com  
E-mail: sales@pasternack.com

ITEM NO. PE85NS5001  
DRAWN BY DZINN  
CAGE CODE A 53919

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.