



## WR-187 Waveguide Shim, CPR-187F flange, 7mm Aluminum

### Waveguide Accessories Technical Data Sheet

PEW187FS7

#### Features

- WR-187 Waveguide Shim
- CPR-187F Flange Configuration
- Frequency Range: 3.94 GHz to 5.99 GHz
- 7 mm Thick Aluminum Construction

#### Description

PEW187FS7 is a WR-187 waveguide shim with operating frequency range from 3.94 GHz to 5.99 GHz. This waveguide shim is fabricated with 7 mm thick aluminum by high precision manufacturing process. PEW187FS7 can be used to bridge gaps between WR-187 waveguide components with CPR-187F flanges. Pasternack offers wide selection of waveguide components with high performance available in stock and same-day shipping to customers worldwide.

#### Mechanical Specifications

Body Material	Aluminum
Body Finish	Anticorrosion grey paint
Length	0.276 in [7.01 mm]
Width	3.5 in [88.9 mm]
Height	2.5 in [63.5 mm]
Weight	0.441 lbs [200.03 g]

#### Compliance Certifications (see [product page](#) for current document)

WR-187 Waveguide Shim, CPR-187F flange, 7mm Aluminum from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-187 Waveguide Shim, CPR-187F flange, 7mm Aluminum PEW187FS7](#)


URL: <https://www.pasternack.com/pew187fs7-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


# PEW187FS7 CAD Drawing

WR-187 Waveguide Shim, CPR-187F flange, 7mm Aluminum

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/3/2020	S.PONG

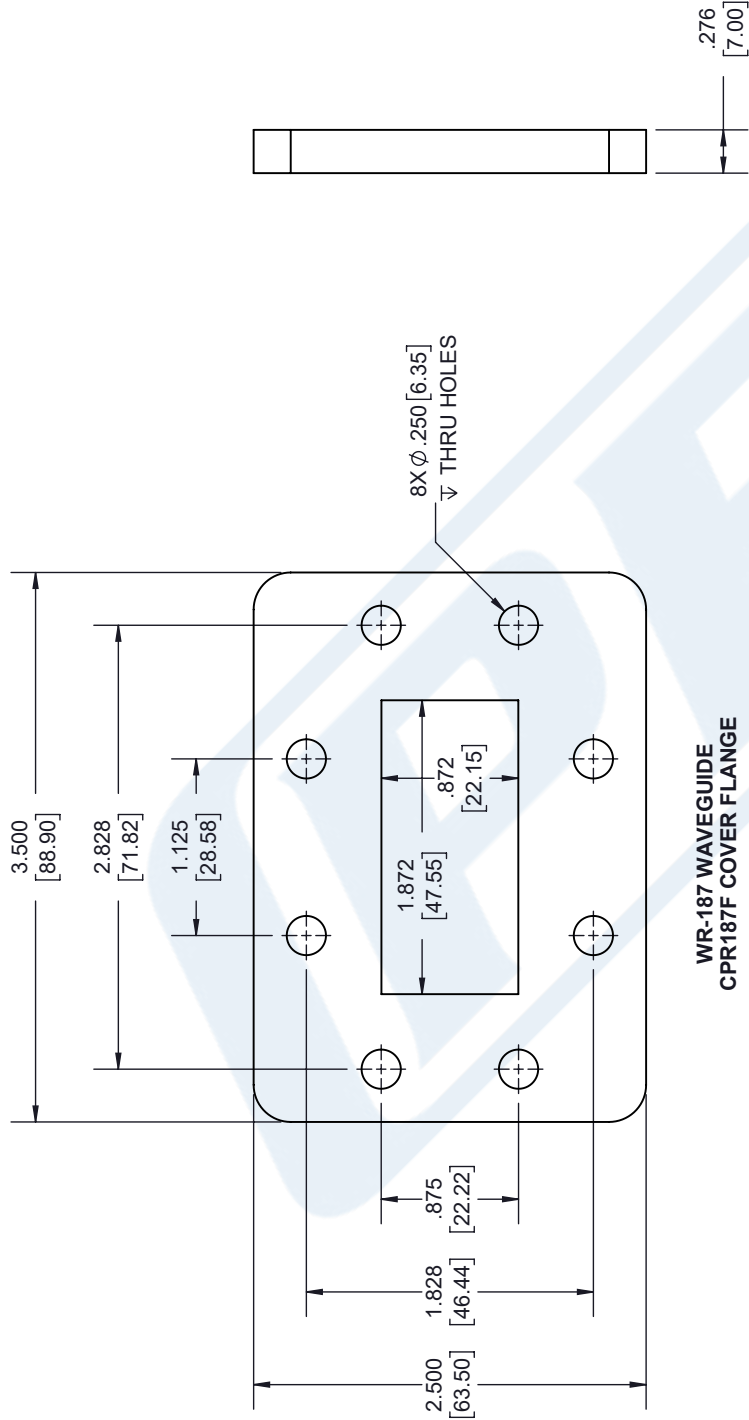

WR-187 WAVEGUIDE  
CPR187F COVER FLANGE

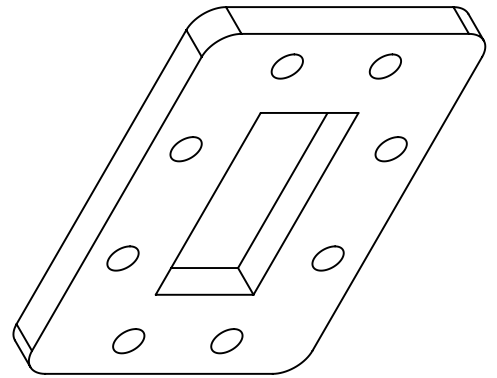

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5.08]    FRACTIONS ± 1/32  
 .XX = ±.02 [ .51]    ANGLES ± 1°  
 .XXX = ±.005 [ .13]

CABLE LENGTH (L), TOLERANCES:  
 L ≤ 12 [305] = +1 [25] / -0  
 12 [305] < L ≤ 60 [1524] = +2 [51] / -0  
 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0  
 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0  
 300 [7620] < L = +5% / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE** **PASTERNAK**  
an INFINITE brand

Pasternack Enterprises, Inc.  
 P. O. Box 16759, Irvine, CA 92623.  
 Phone: 1.949.261.1920 | 1.866.727.8376  
 Fax: 1.949.261.7451  
 Website: www.pasternack.com  
 E-mail: sales@pasternack.com

SIZE [CAGE CODE] DRAWN BY ITEM NO.  
 A 53919 K.DANG PEW187FS7

THIRD-ANGLE PROJECTION

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION  
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A