



50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 12 dB Gain And 10 dB P1db

TECHNICAL DATA SHEET

PE1514

50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 12 dB Gain And 10 dB P1db

Configuration

Design	Broadband Amplifier
RF Input Connector	SMA Female
RF Input Connector Impedance	50 Ohms
RF Output Connector	SMA Female
DC Bias Connector	Solder Pin

Electrical Specifications

Frequency Range, GHz	0.01 to 3
Typical Gain, dB	12
Maximum Noise Figure, dB	5.5
Output at 1 dB Compression Point, dBm	10
Operating DC Voltage, Volts	15
Maximum DC Current, mA	40

Frequency 1

Frequency, GHz	0.01 to 2
Input Return Loss, dB	15
Output Return Loss, dB	15
Output at 1 dB Compression Point, dBm	10
Noise Figure, dB	5.5
Gain, dB	12

Frequency 2

Frequency, GHz	2 to 3
Return Loss, dB	11
Output Return Loss, dB	10
Output at 1 dB Compression Point, dBm	9
Noise Figure, dB	7
Gain, dB	10

Mechanical Specifications

Size

Length, in [mm]	2.18 [55.37]
Width/Dia., in [mm]	1.18 [29.97]
Height, in [mm]	0.49 [12.45]

RF Input Connector

Type	SMA Female
------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 12 dB Gain And 10 dB P1db PE1514](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



50 Ohm SMA Amplifier Operating From 10 MHz
to 3 GHz With 12 dB Gain And 10 dB P1db

TECHNICAL DATA SHEET

PE1514

RF Output Connector

Type SMA Female

DC Bias Connector

Type Solder Pin

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

Plotted and Other Data

Notes: Values at 25 °C, sea level

50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 12 dB Gain And 10 dB P1db from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 10 MHz to 3 GHz With 12 dB Gain And 10 dB P1db PE1514](http://www.pasternack.com/50-ohm-sma-amplifier-10-mhz-3000-mhz-12-db-gain-pe1514-p.aspx)

URL: <http://www.pasternack.com/50-ohm-sma-amplifier-10-mhz-3000-mhz-12-db-gain-pe1514-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE1514 CAD Drawing

50 Ohm SMA Amplifier Operating From 10 MHz to
3 GHz With 12 dB Gain And 10 dB P1db

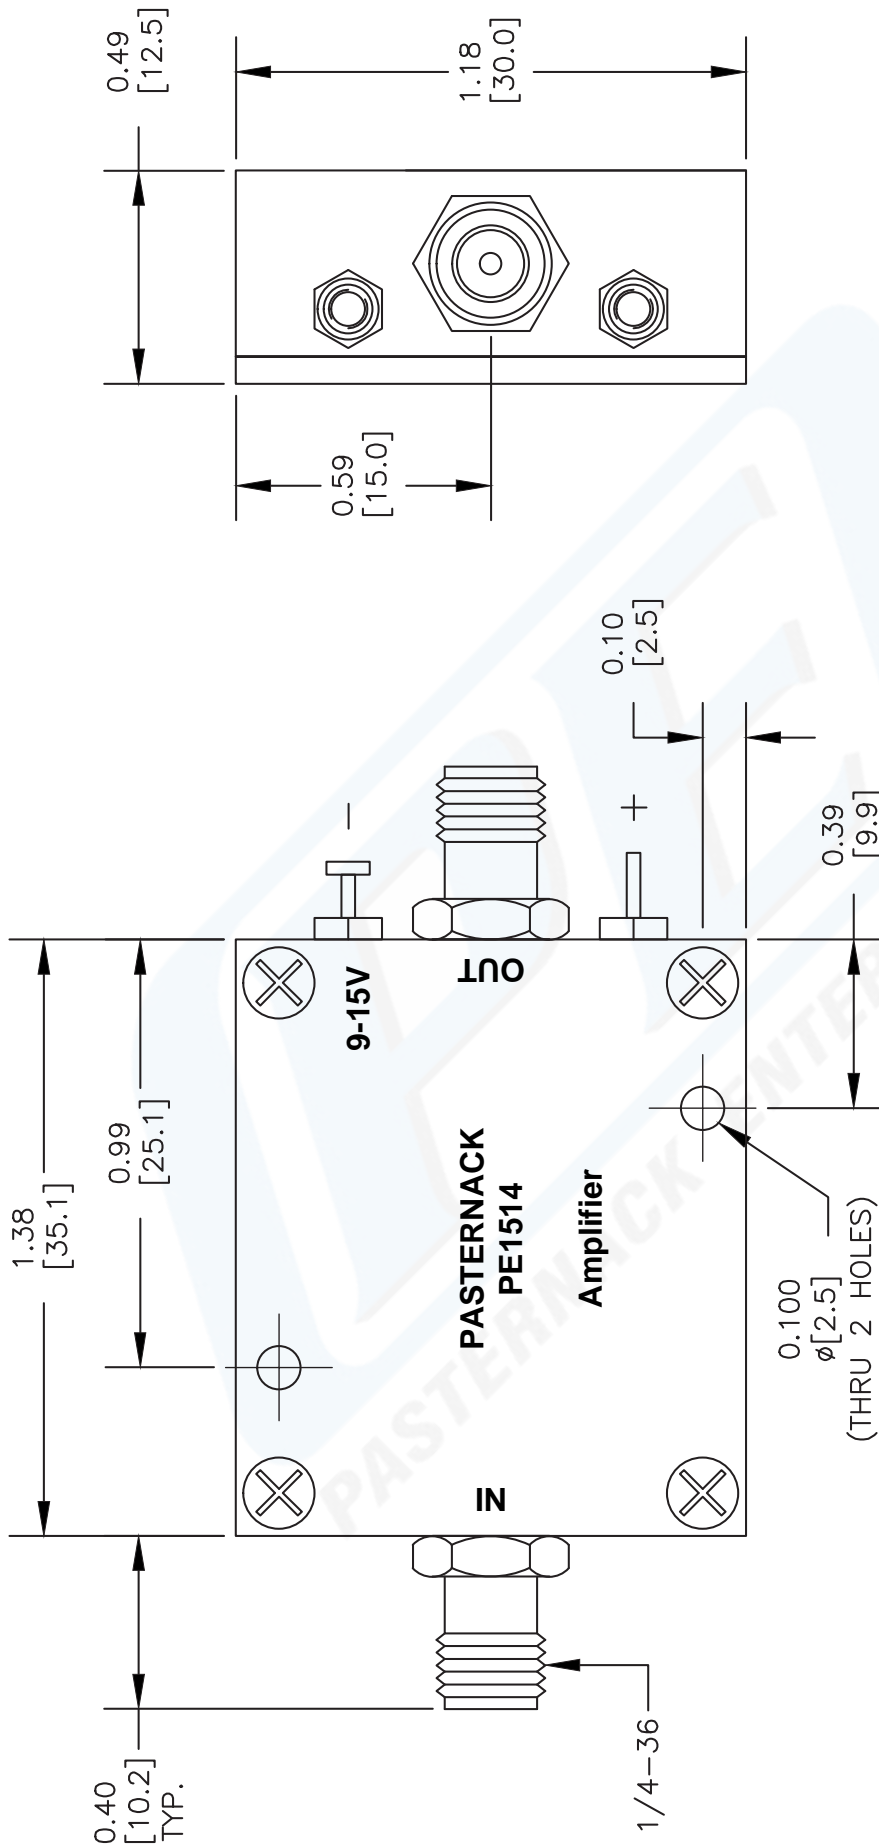

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE1514

FSCM NO. 53919

CAD FILE 032013-A

SCALE N/A

SIZE A

2233

PASTERNAK
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com