



TECHNICAL DATA SHEET

The PE15A3270 low noise amplifier operates across a wide frequency range from 2 GHz to 20 GHz. The design utilizes GaAs PHEMT MMIC technology for high efficiency and high linearity. Typical performance includes 14.5 dB small signal gain, 2.5 dB noise figure, up to +13 dBm of output power at P1dB and +23 dBm output IP3, while using a +9V to +15V single DC supply. The design exhibits a very flat gain response across a wide frequency band. Input/output ports are matched for 50 ohms and are DC blocked. The design also incorporates integrated bias sequencing circuitry and voltage regulators to allow for flexible biasing positive voltage supply. The drop-in package is hermetically sealed with field replaceable SMA connectors and has an operating temperature range of -55°C to +85°C. And for added confidence, this rugged package assembly is designed to meet MIL-STD-883 test conditions for Hermeticity and Temperature Cycle.

Features

- LNA Module
- · Extremely wide frequency band
- GaAs PHEMT MMIC Technology
- Flat Gain 14.5 dB +/- 0.5 dB
- High Output IP3 +23 dBm
- Output P1dB up to +13 dBm typical

Applications

- Electronic Warfare
- Electronic Countermeasures
- Microwave Radio
 Fiber Optic

- Regulated Supply and Bias Sequencing
- Hermetically Sealed Module
- Mil Spec Compliant
- Field Replaceable SMA Connectors
- -55°C to +85°C Operating Temperature
 - Space Systems
 - Test Instrumentation
 - Telecom Infrastructure

Electrical Specifications (TA= 25°C, VDC1 = 12 Vdc)

Description	Minimum	Typical	Maximum	Units	
Frequency Range	2		20	GHz	
Gain		14.5		dB	
Output at 1 dB Compression Point		+13		dBm	
Noise Figure		2.5		dB	
Operating DC Voltage 1		12		Volts	
Operating Temperature Range (OTR)	-55		+85	°C	

VSAT

Radar

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA PE15A3270

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com

1

PE15A3270





TECHNICAL DATA SHEET

PE15A3270

Performance by Frequency

Description	Min.	Тур.	Max.	Min.	Тур.	Max.	Min.	Тур.	Max.	Units
Frequency Range		2.0 - 6.0			6.0 - 16.0			16.0 - 20.0	C	GHz
Gain	13	15		12	14.5		11	13		dB
Gain Flatness		±.025			±0.5			±0.5		dB
Gain Variation Over Temperature		0.015	0.025		0.015	0.025		0.015	0.025	dB/ °C
Noise Figure		3.5	4.5		2.5	3.5		4	5	dB
Input Return Loss		15			20			10		dB
Output Return Loss		13			15			8		dB
Output Power For 1 dB Compression (P1dB)	11	14		10	13		8.5	11.5		dBm
Saturated Output Power (Psat)		17			15.5			14		dBm
Output Third Order Intercept (IP3)		25			23			21		dBm
Supply Current		78			78	<u> </u>		78		mA

Mechanical Specifications

Size Length Width Height Weight

Connector Option Input Connector Output Connector

Environmental Specifications

Temperature Operating Range Storage Range

Temperature Cycling Hermetic Seal

ESD Sensitivity



0.64 in [16.26 mm] 0.59 in [14.99 mm] 0.29 in [7.37 mm]

0.055 lbs [24.95 g]

Field Replaceable SMA Female SMA Female

-55 to +85 deg C -65 to +150 deg C

MIL-STD-883, Method 101C, Cond B Gross Leak MIL-STD-883 Method 1014C1/Fine Leak MIL-STD-883, Method 1014A2, 5 x 10-8 atm cc ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA PE15A3270

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451






PE15A3270

2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA

TECHNICAL DATA SHEET

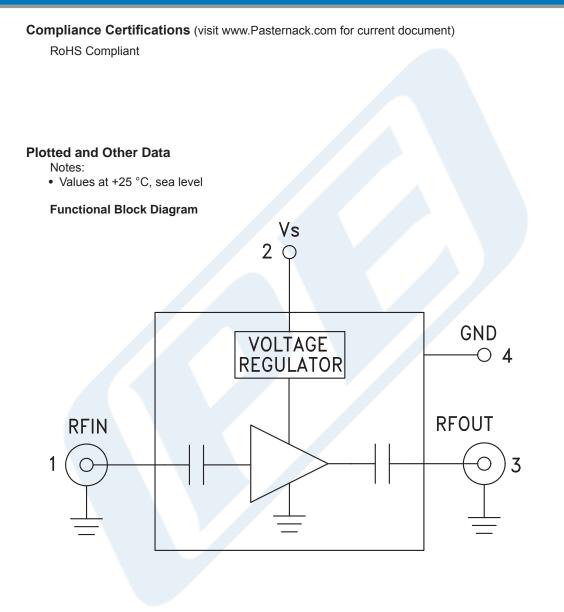

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA PE15A3270


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451





TECHNICAL DATA SHEET

PE15A3270

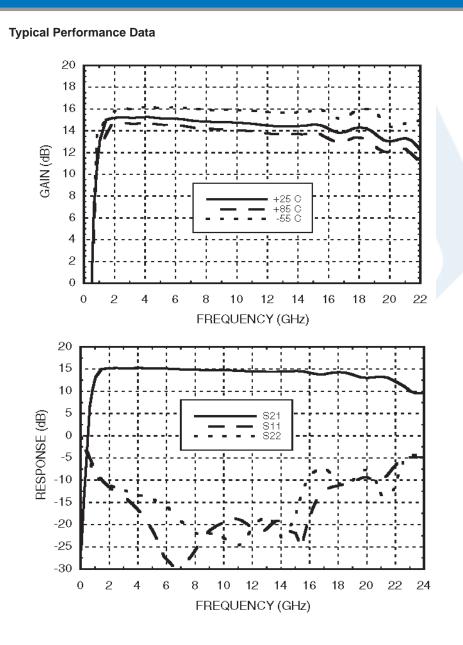

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA PE15A3270


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451





TECHNICAL DATA SHEET

PE15A3270

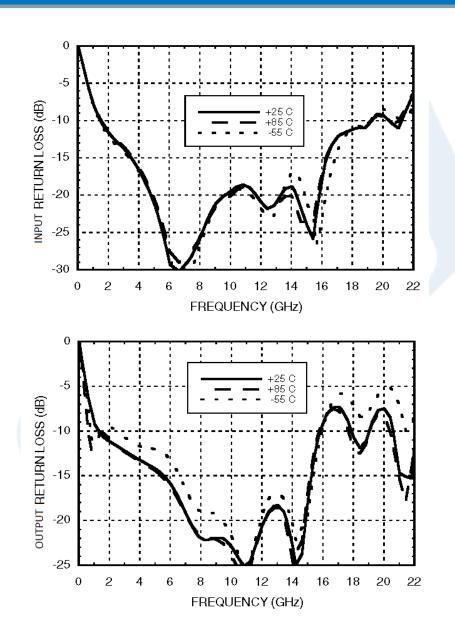

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA PE15A3270


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451





TECHNICAL DATA SHEET

PE15A3270

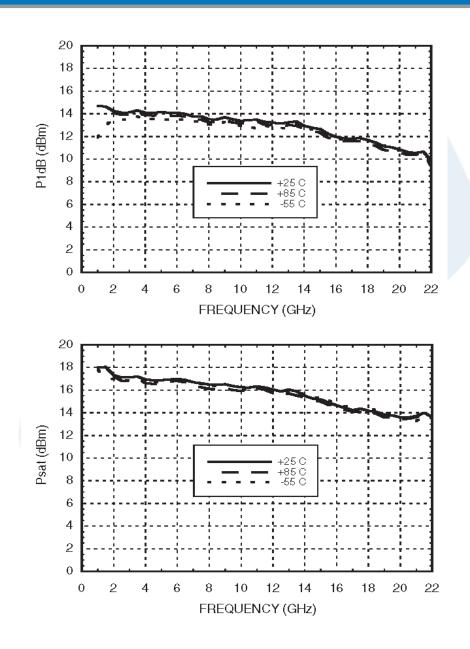

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA PE15A3270


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451





TECHNICAL DATA SHEET

PE15A3270

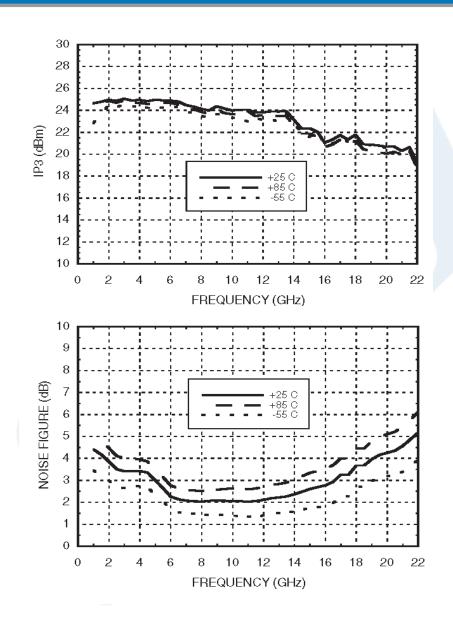

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA PE15A3270

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com

7





TECHNICAL DATA SHEET

PE15A3270

2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA PE15A3270

URL: https://www.pasternack.com/2.5-db-20-ghz-low-noise-broadband-amplifier-14.5-db-gain-sma-pe15a3270-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

PE15A3270 CAD Drawing

2.5 dB NF, 13 dBm P1dB, 2 GHz to 20 GHz, Low Noise Broadband Amplifier, 14.5 dB Gain, SMA

