

Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA



PE1V31007

# Voltage Control Oscillators Technical Data Sheet

## **Features**

- 75 to 150 MHz Bandwidth
- -110 dBc/Hz typ @ 10kHz offset
- Tuning Voltage 0.5V to 18V
- Pout = +11 dBm typ
- Harmonics = -20 dBc typ

## **Applications**

- Phase Locked Loop
- Function Generators
- Frequency Synthesizers
- Receivers

- · RoHS Compliant Assembly
- Compact Size Rugged Metal Coaxial package
- Field Replaceable SMA Female Connector
- Designed to meet MIL-STD-202 Environmental Conditions
- Electronic Jamming Equipment
- Local Oscillator
- Wireless Communications
- SATCOM

- Optical Communications
- Military Electronic Systems

## Description

The PE1V31007 is a High Reliability Low Noise Voltage Controlled Oscillator (VCO) which covers a 75 to 150 MHz frequency band with a voltage tuning range from 0.5V to 18V. This design features exceptional phase noise performance of -110 dBc/Hz typ @ 10 kHz offset. Supply Voltage is +15V with a generated output power level of +11 dBm typ and 2nd harmonic output of -20 dBc typical. The assembly is RoHS compliant and available in a compact sized rugged metal housing which supports a field replaceable SMA female connector, RFI Voltage and ground pins. The VCO operates over a temperature range of -40°C to +85°C and is designed to meet a variety of MIL-STD-202 test conditions including Humidity, Shock, and Vibration.

## **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	75		150	MHz
Tuning Voltage	0.5		18	Vdc
Supply Voltage (DC)	14	15	16	Vdc
Supply Current (DC)		18	20	mA
Phase Noise @ 1kHz Offset		-83	-80	dBc/Hz
Phase Noise @ 10kHz Offset		-110	-108	dBc/Hz
Phase Noise @ 100kHz Offset		-130	-129	dBc/Hz
Output Power	+10	+11	+12	dBm
Tuning Sensitivity (Kvco)	3		8	MHz/V
Pushing		0.2	0.4	MHz/V
Pulling (pk-pk)		400	800	KHz
Tuning Port Capacitance		100		pF
Load Impedance		50		Ohms
2nd Harmonics		-20	-15	dBc

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA PE1V31007

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451



# Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA



PE1V31007

# Voltage Control Oscillators Technical Data Sheet

Electrical Specification Notes: Pulling @ 1.5:1 VSWR

#### **Mechanical Specifications**

Size Length Width Height Weight Body Material and Plating Design Output Connector

## **Environmental Specifications**

- **Temperature** Operating Range Storage Range
- Humidity Shock Vibration Temperature Cycle ESD Sensitivity



0.95 in [24.13 mm] 0.95 in [24.13 mm] 0.285 in [7.24 mm]

0.028 lbs [12.7 g] Aluminum Commercial SMA Female

-40 to +85 deg C -55 to +125 deg C

MIL-STD-202, Method 103, 90% RH, +65 C MIL-STD-202, Method 213I MIL-STD-202, Method 204D MIL-STD-202, Method 107B ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in ESD Workstation.

Compliance Certifications (see product page for current document)

## Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA PE1V31007

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451





PE115007 1124150 5 5 8 8

Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA

# Voltage Control Oscillators Technical Data Sheet

PE1V31007

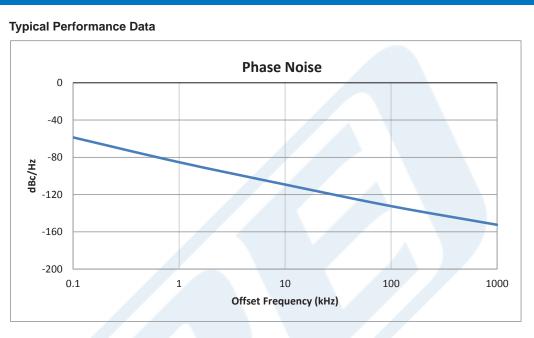

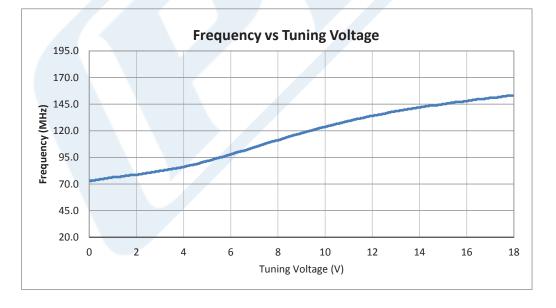

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA PE1V31007

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451






PE1V31007

Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA

# Voltage Control Oscillators Technical Data Sheet

**Tuning Sensitivity** MHz/V Tuning Voltage (V)

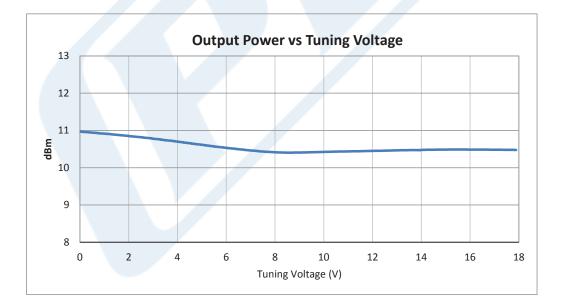

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA PE1V31007

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451






Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA

# Voltage Control Oscillators Technical Data Sheet

PE1V31007

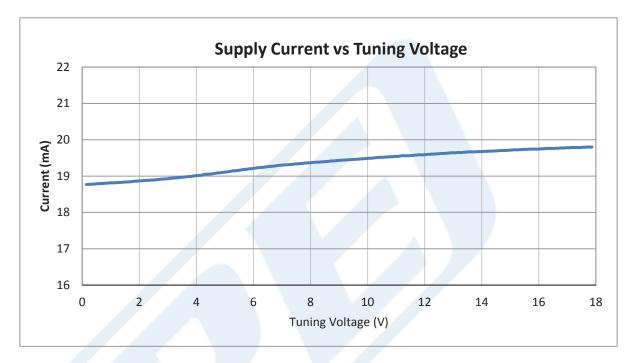

Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA PE1V31007

URL: https://www.pasternack.com/voltage-controlled-oscillator-vco-150-mhz-pe1v31007-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com

PE1V31007 CAD Drawing Voltage Controlled Oscillator (VCO) From 75 MHz to 150 MHz, Phase Noise of -110 dBc/Hz and SMA

