



2 Way N Wilkinson Power Divider From 4 GHz to 8 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE2035

Features

- 2-Way Power Divider
- High Power Wilkinson Design
- 4 to 8 GHz Frequency Range
- Max Power 30 Watts (CW)
- Insertion Loss < 0.7 dB
- Isolation > 20 dB

Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

Description

Pasternack carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Pasternack's resistive and Wilkinson power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types such as 2.92mm, BNC, N and SMA.

The PE2035 is a 2-way high power Wilkinson power divider that operates from 4 to 8 GHz and can handle up to 30 Watts (CW) with 0.7 dB max insertion loss and 20 dB min isolation. The package interface uses N female connectors and is REACH and RoHS compliant.

Electrical Specifications

Design	Wilkinson
Number of Output Ports	2

Description	Minimum	Typical	Maximum	Units
Frequency Range	4		8	GHz
Impedance		50		Ohms
Input VSWR			1.3:1	
Output VSWR			1.3:1	
Insertion Loss			0.7	dB
Isolation	20			dB
Input Power (CW)			30	Watts

Electrical Specification Notes:
 Max input power rated for load VSWR of 1.25:1 or better.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way N Wilkinson Power Divider From 4 GHz to 8 GHz Rated at 30 Watts PE2035](#)



2 Way N Wilkinson Power Divider From
4 GHz to 8 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE2035

Mechanical Specifications

Size

Length	2 in [50.8 mm]
Width	1 in [25.4 mm]
Height	1 in [25.4 mm]
Weight	0.357 lbs [161.93 g]

Configuration

Package Type	Connectorized
Input Connector	N Female
Output Connectors	N Female

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	
REACH Compliant	12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way N Wilkinson Power Divider From 4 GHz to 8 GHz Rated at 30 Watts PE2035](#)





2 Way N Wilkinon Power Divider From
4 GHz to 8 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE2035

Typical Performance Data

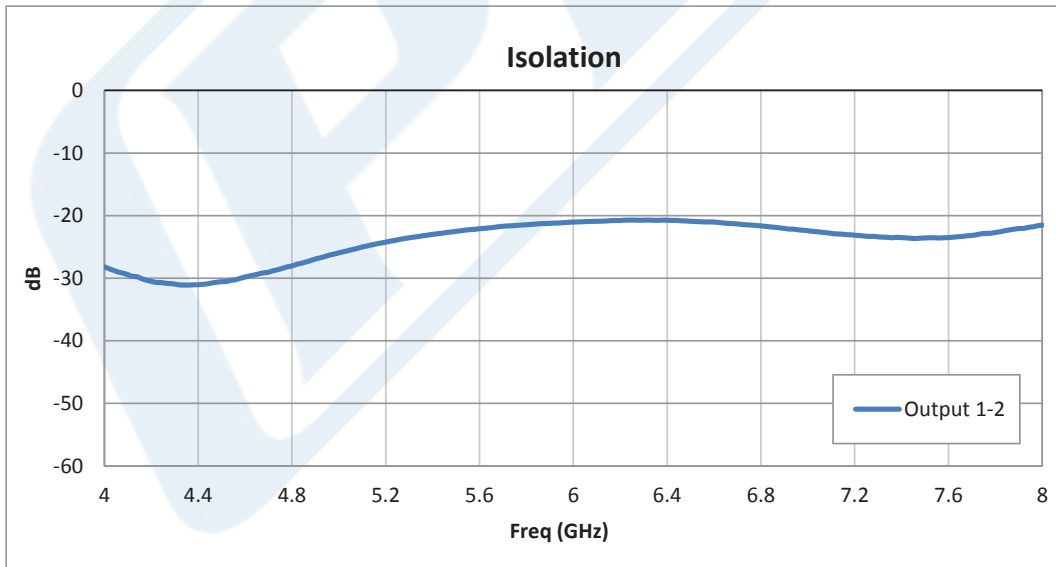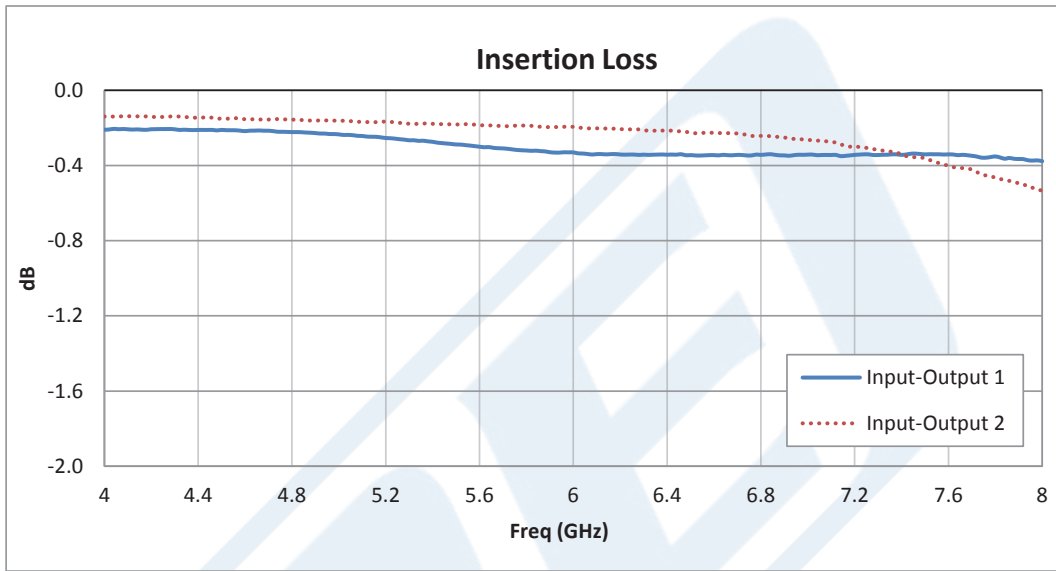



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way N Wilkinon Power Divider From 4 GHz to 8 GHz Rated at 30 Watts PE2035](#)



2 Way N Wilkinson Power Divider From
4 GHz to 8 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE2035

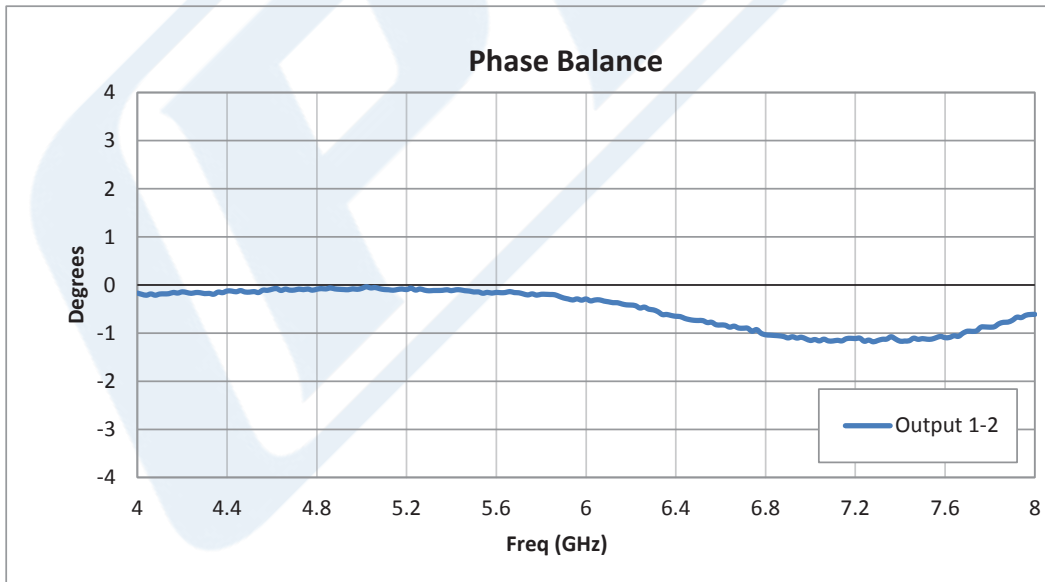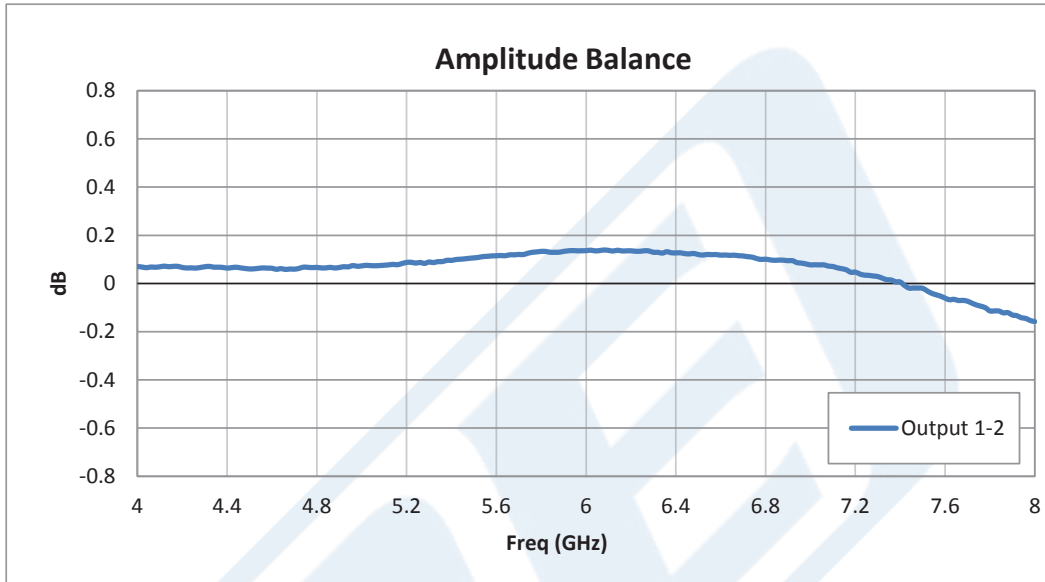


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way N Wilkinson Power Divider From 4 GHz to 8 GHz Rated at 30 Watts PE2035](#)



2 Way N Wilkinon Power Divider From
4 GHz to 8 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE2035

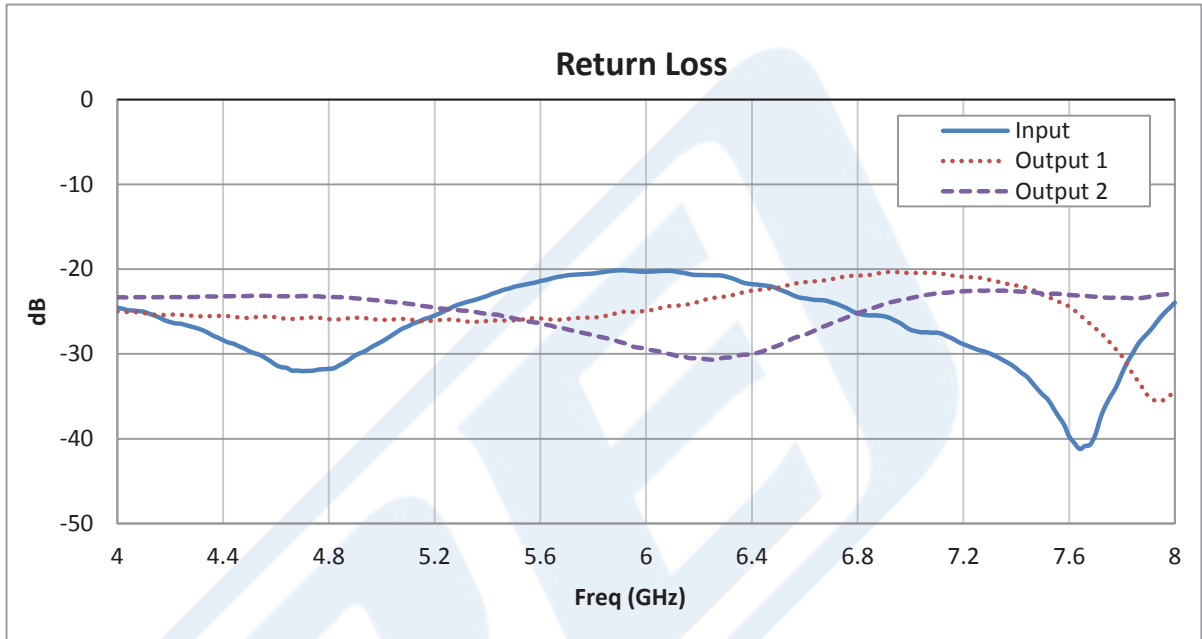

2 Way N Wilkinon Power Divider From 4 GHz to 8 GHz Rated at 30 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 Way N Wilkinon Power Divider From 4 GHz to 8 GHz Rated at 30 Watts PE2035](#)

URL: <http://www.pasternack.com/2-way-n-reactive-power-divider-4-ghz-8-ghz-10-watts-pe2035-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE2035 CAD Drawing

2 Way N Wilkinson Power Divider From 4 GHz to 8 GHz Rated at 30 Watts

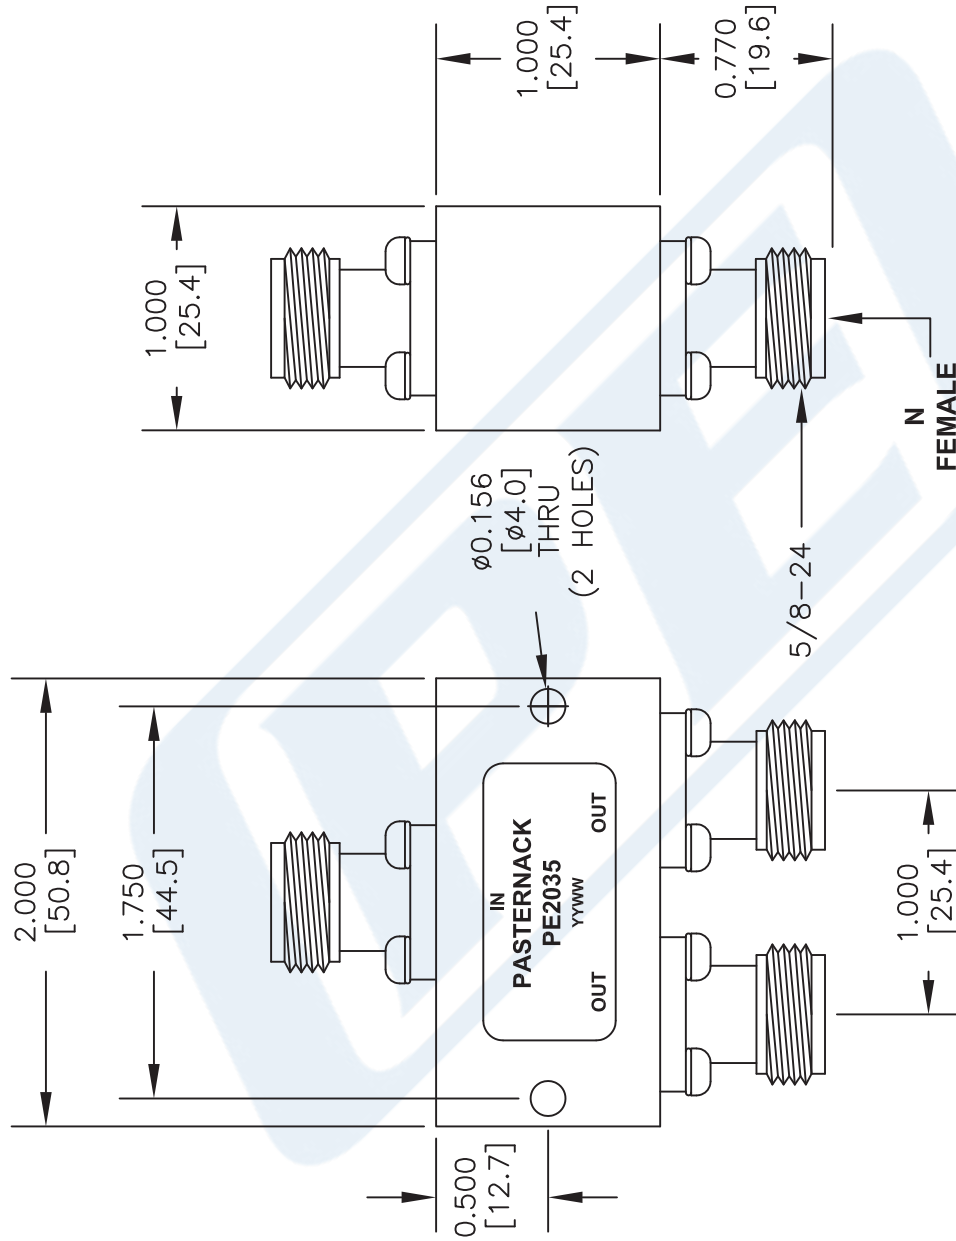

STANDARD TOLERANCES

.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE2035

FSCM NO. 53919

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE 050616

SCALE N/A

SIZE A

3045