



## 8 Way SMA Power Divider From 800 MHz to 2.5 GHz Rated at 30 Watts

### Power Dividers Technical Data Sheet

**PE20S0021**

#### Features

- 0.8 to 2.5 GHz
- 30 Watts Max Power
- $\pm 8^\circ$  Phase Balance
- 20 dB min Isolation
- 8 way SMA divider
- Meets MIL-STD-202F for Humidity, Shock, Vibration, Altitude, Temperature Cycle

#### Applications

- Communications Systems
- CDMA,GSM,LTE
- Amplifier Systems
- Amplifier Power Dividing
- Aviation/Aerospace
- Defense Applications

#### Description

PE20S0021 is a passive 8 way RF Power Divider with 50 ohm SMA female connectors operating from 0.8 to 2.5 GHz, with a max input power of 30 watts. The PE20S0021 has less than 20 dB Isolation, 1.2 dB maximum Insertion loss and a Max VSWR of 1.4:1; along with a phase balance of  $\pm 8$  degrees and an amplitude balance of  $\pm 0.5$  dB. The RF Divider operates in a temperature range from  $-55^\circ\text{C}$  to  $85^\circ\text{C}$  and meets Military standards for Humidity, Shock, Vibration, Altitude, and Temperature. Power dividers have many applications and so perform many valuable functions within the RF/Microwave world. Examples are antenna beam forming, taps for cable distributed systems combining feeds to and from antennae.

#### Electrical Specifications

Design: Wilkinson  
 Number of Output Ports: 8

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.8		2.5	GHz
Impedance		50		Ohms
Input VSWR			1.4:1	
Input Return Loss		15		dB
Insertion Loss			1.2	dB
Isolation	20			dB
Amplitude Balance			0.5	dB
Phase Balance			5	Degrees
Input Power (CW)			30	Watts
Reverse Power (CW)			1	Watt

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 Way SMA Power Divider From 800 MHz to 2.5 GHz Rated at 30 Watts PE20S0021](#)



8 Way SMA Power Divider From 800 MHz  
to 2.5 GHz Rated at 30 Watts

**Power Dividers Technical Data Sheet**

**PE20S0021**

**Mechanical Specifications**

**Size**

Length	5.906 in [150.01 mm]
Width	3.386 in [86 mm]
Height	0.55 in [13.97 mm]
Weight	0.85 lbs [385.55 g]

**Configuration**

Package Type	Connectorized
Input Connector	SMA Female
Output Connectors	SMA Female

**Environmental Specifications**

**Temperature**

Operating Range	-55 to +85 deg C
Storage Range	-55 to +100 deg C

**Humidity**

Shock	MIL-STD-202F, METHOD 103B COND. B
Vibration	MIL-STD-202F, METHOD 213B COND. B
Altitude	MIL-STD-202F, METHOD 204D COND. B
Temperature Cycle	MIL-STD-202F, METHOD 105C COND. B
	MIL-STD-202F, METHOD 107D COND. A

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 Way SMA Power Divider From 800 MHz to 2.5 GHz Rated at 30 Watts PE20S0021](#)





8 Way SMA Power Divider From 800 MHz  
to 2.5 GHz Rated at 30 Watts

**Power Dividers Technical Data Sheet**

**PE20S0021**

**Typical Performance Data**

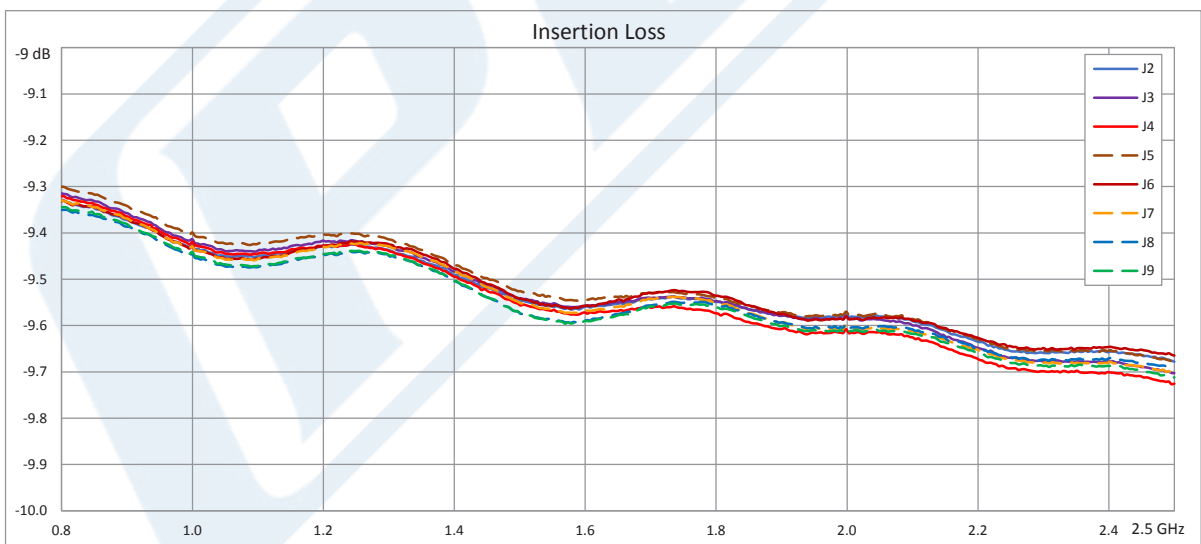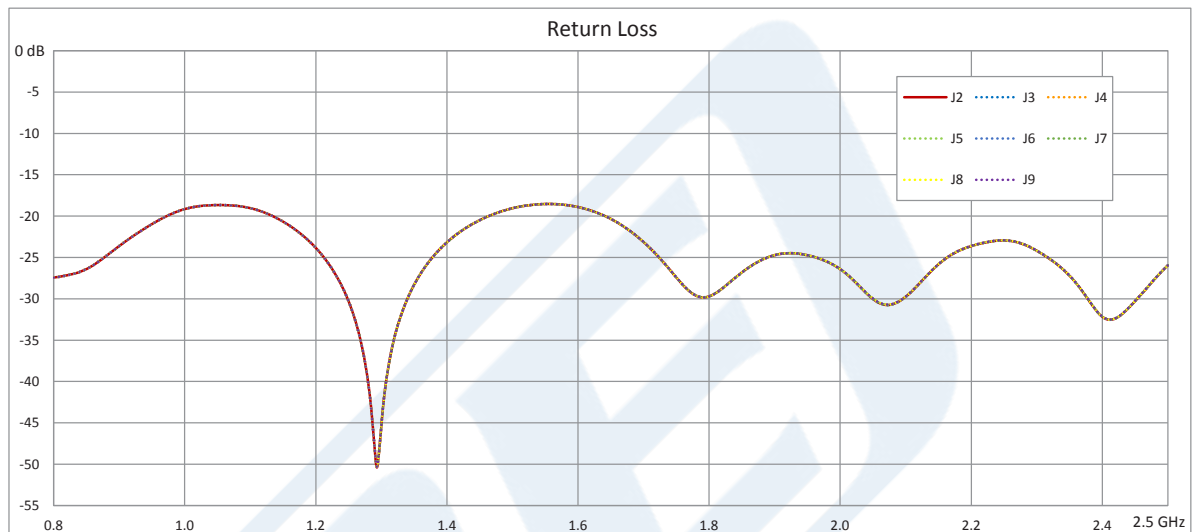

8 Way SMA Power Divider From 800 MHz to 2.5 GHz Rated at 30 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 Way SMA Power Divider From 800 MHz to 2.5 GHz Rated at 30 Watts PE20S0021](#)

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 Way SMA Power Divider From 800 MHz to 2.5 GHz Rated at 30 Watts PE20S0021](#)



## 8 Way SMA Power Divider From 800 MHz to 2.5 GHz Rated at 30 Watts

### Power Dividers Technical Data Sheet


**PE20S0021**

URL: <https://www.pasternack.com/8-way-sma-power-divider-800-mhz-2.5-ghz-30-watts-pe20s0021-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE20S0021 CAD Drawing

8 Way SMA Power Divider From 800 MHz to 2.5 GHz Rated at 30 Watts

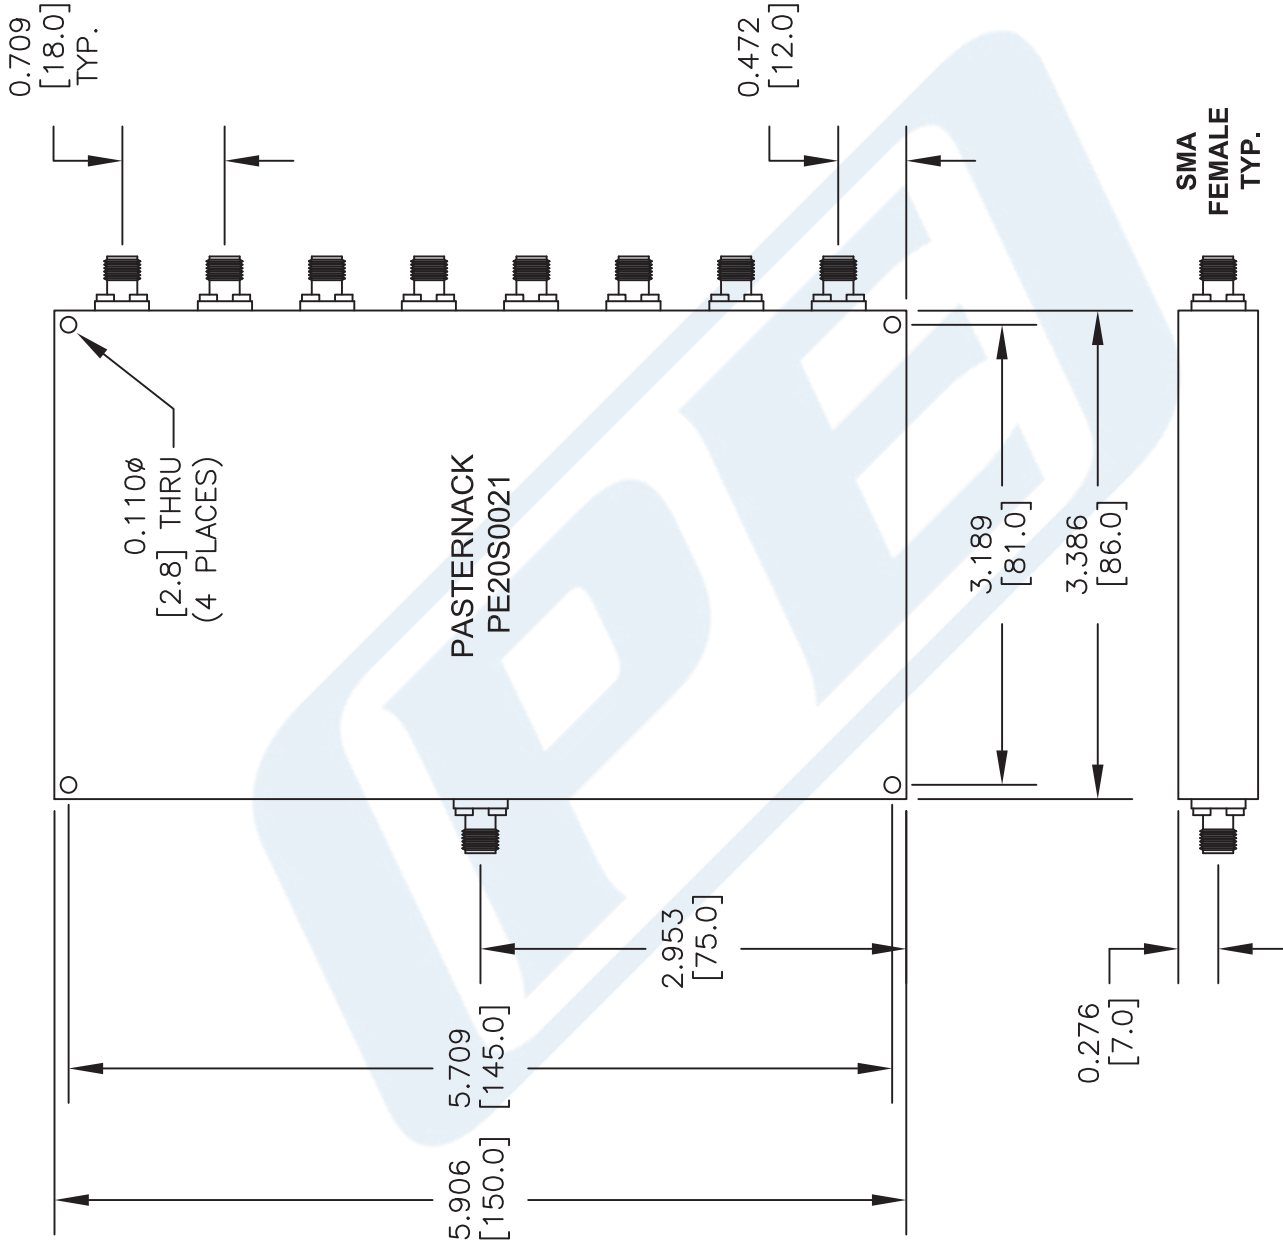

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE20S0021**

FSCM NO. 53919

CAD FILE 041315

SCALE N/A

SIZE A

2233



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)