



Directional 30 dB N Coupler From 1 GHz  
to 4 GHz Rated to 600 Watts

## Couplers Technical Data Sheet

PE2228-30

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	1		4	GHz
Impedance		50		Ohms
Coupling		30 ±1		dB
Frequency Sensitivity			±0.7	dB
Insertion Loss			0.2	dB
Directivity	15			dB
Main Line VSWR			1.15:1	
Input Power (CW)			600	Watts
Input Power (Peak)			10	KWatts

Electrical Specification Notes:  
Values at 25°C, sea level.

### Mechanical Specifications

#### Size

Length	5.35 in [135.89 mm]
Width/Dia.	0.8 in [20.32 mm]
Height	1.6 in [40.64 mm]
Weight	0.481 lbs [218.18 g]

#### Configuration

Input Connector	N Female
Output Connector	SMA Female
Coupled Connectors	SMA Female

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 30 dB N Coupler From 1 GHz to 4 GHz Rated to 600 Watts PE2228-30](#)



## Directional 30 dB N Coupler From 1 GHz to 4 GHz Rated to 600 Watts

### Couplers Technical Data Sheet

PE2228-30

Directional 30 dB N Coupler From 1 GHz to 4 GHz Rated to 600 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 30 dB N Coupler From 1 GHz to 4 GHz Rated to 600 Watts PE2228-30](https://www.pasternack.com/directional-30-db-n-coupler-1-4-ghz-600-watts-pe2228-30-p.aspx)

URL: <https://www.pasternack.com/directional-30-db-n-coupler-1-4-ghz-600-watts-pe2228-30-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE2228-30 CAD Drawing

Directional 30 dB N Coupler From 1 GHz to 4 GHz Rated to 600 Watts

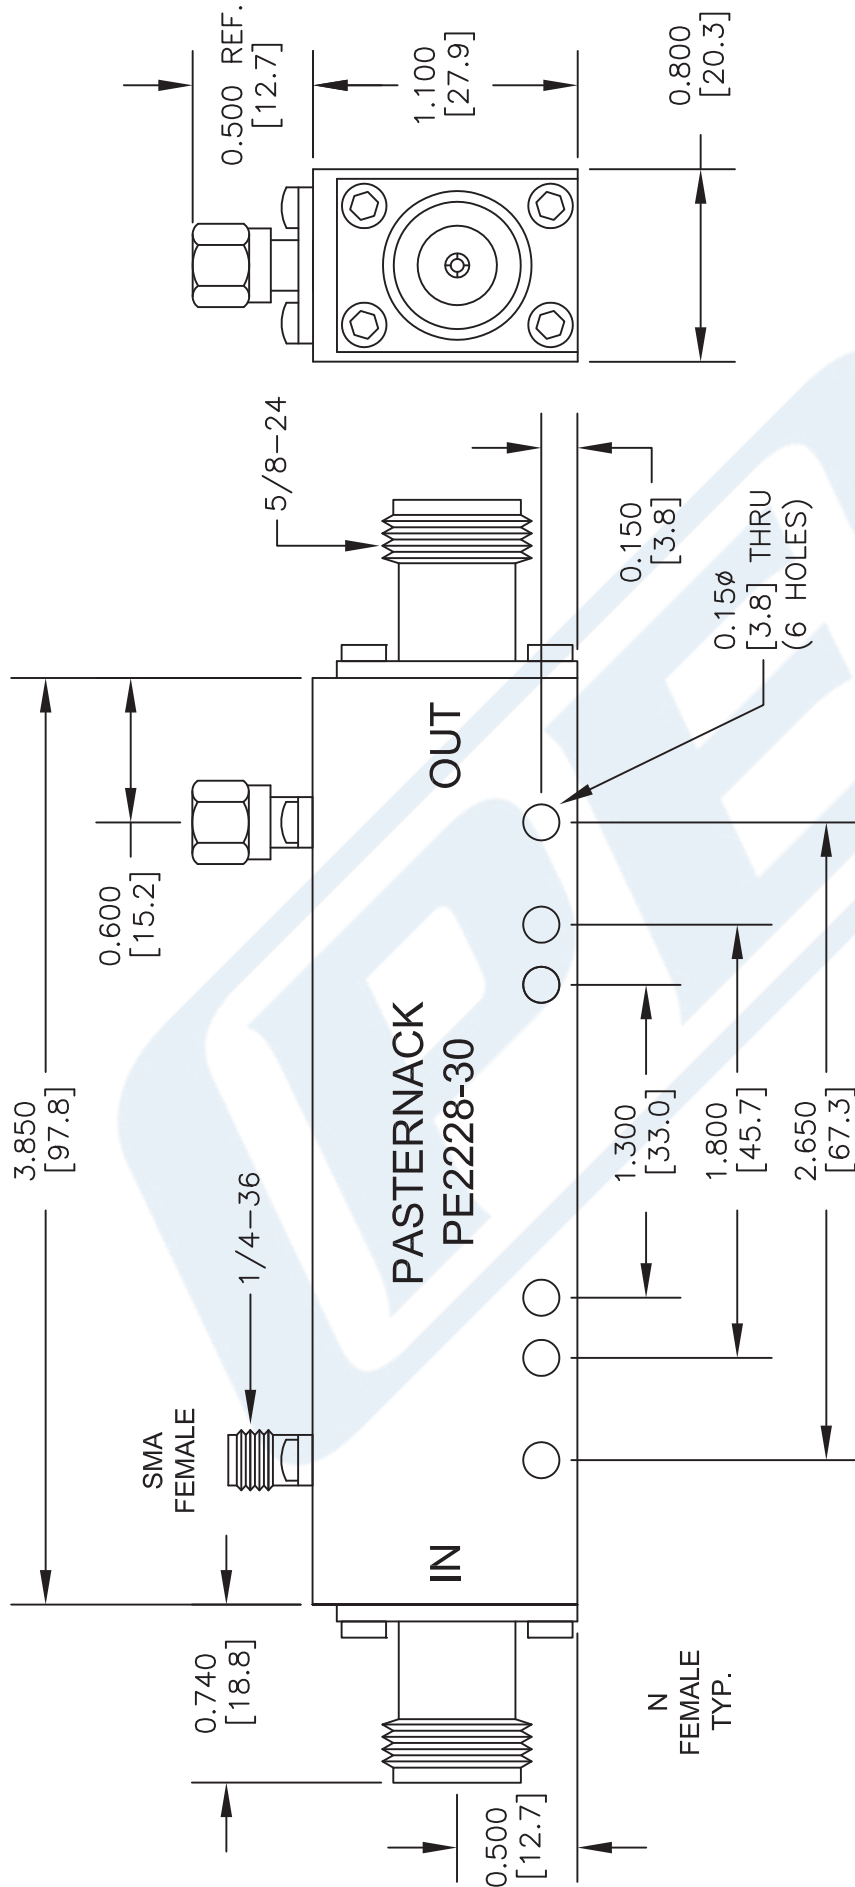

**STANDARD TOLERANCES**  
 .X ±0.2  
 .XX ±0.1  
 .XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<p>NOTES:                  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.                  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.                  3. DIMENSIONS ARE IN INCHES [mm].</p>		<p>DWG TITLE  <b>PE2228-30</b></p>	
<p>CAGE CODE <b>53919</b></p>		<p>CAD FILE 101116</p>	
<p>SCALE N/A</p>		<p>SIZE A</p>	
<p>2233</p>		<p>2233</p>	

**PE PASTERNAK**  
 THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com