



75 Ohm F Male to 75 Ohm F Male Cable 36 Inch Length Using 75 Ohm RG6 Coax

RF Cable Assemblies Technical Data Sheet

PE37163-36

Configuration

- Connector 1: F Male
- Connector 2: F Male
- Cable Type: RG6

Features

- Shielding Effectivity > 90 dB
- 65.9% Phase Velocity
- Double Shielded
- PVC (NC) Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE37163-36 75 ohm type F male to 75 ohm type F male 36 inch cable using 75 ohm RG6 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type F to type F cable assembly has a male to male gender configuration with 75 ohm flexible RG6 coax. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		65.9		%
RF Shielding	90			dB
Capacitance		20.6 [67.59]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Length*	36 in [914.4 mm]
Diameter	0.438 in [11.13 mm]
Weight	0.2736 lbs [124.1 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to 75 Ohm F Male Cable 36 Inch Length Using 75 Ohm RG6 Coax PE37163-36](#)



75 Ohm F Male to 75 Ohm F Male Cable 36 Inch Length Using 75 Ohm RG6 Coax

RF Cable Assemblies Technical Data Sheet

PE37163-36

Cable

Cable Type	RG6
Impedance	75 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Braid
Shield Layer 2	Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.332 in [8.43 mm]

One Time Minimum Bend Radius 3.5 in [88.9 mm]

Connectors

Description	Connector 1	Connector 2
Type	F Male	F Male
Impedance	75 Ohms	75 Ohms
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100µ in. minimum	100µ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100µ in. minimum	100µ in. minimum
Hex Size	7/16 in.	7/16 in.
Torque	15 in-lbs [1.7 Nm]	15 in-lbs [1.7 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to 75 Ohm F Male Cable 36 Inch Length Using 75 Ohm RG6 Coax PE37163-36](#)



75 Ohm F Male to 75 Ohm F Male Cable 36 Inch Length Using 75 Ohm RG6 Coax

RF Cable Assemblies Technical Data Sheet

PE37163-36

How to Order

Part Number Configuration:

PE37163

- **xx**

uu

Unit of Measure:

cm = Centimeters

<blank> = Inches

Length

Base Number

Example: PE37163-12 = 12 inches long cable
PE37163-100cm = 100 cm long cable

75 Ohm F Male to 75 Ohm F Male Cable 36 Inch Length Using 75 Ohm RG6 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm F Male to 75 Ohm F Male Cable 36 Inch Length Using 75 Ohm RG6 Coax PE37163-36](#)


URL: <https://www.pasternack.com/f-male-f-male-rg6au-cable-assembly-pe37163-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE37163-36 CAD Drawing

75 Ohm F Male to 75 Ohm F Male Cable 36 Inch Length Using 75 Ohm RG6 Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/3/2020	S. ELLIS

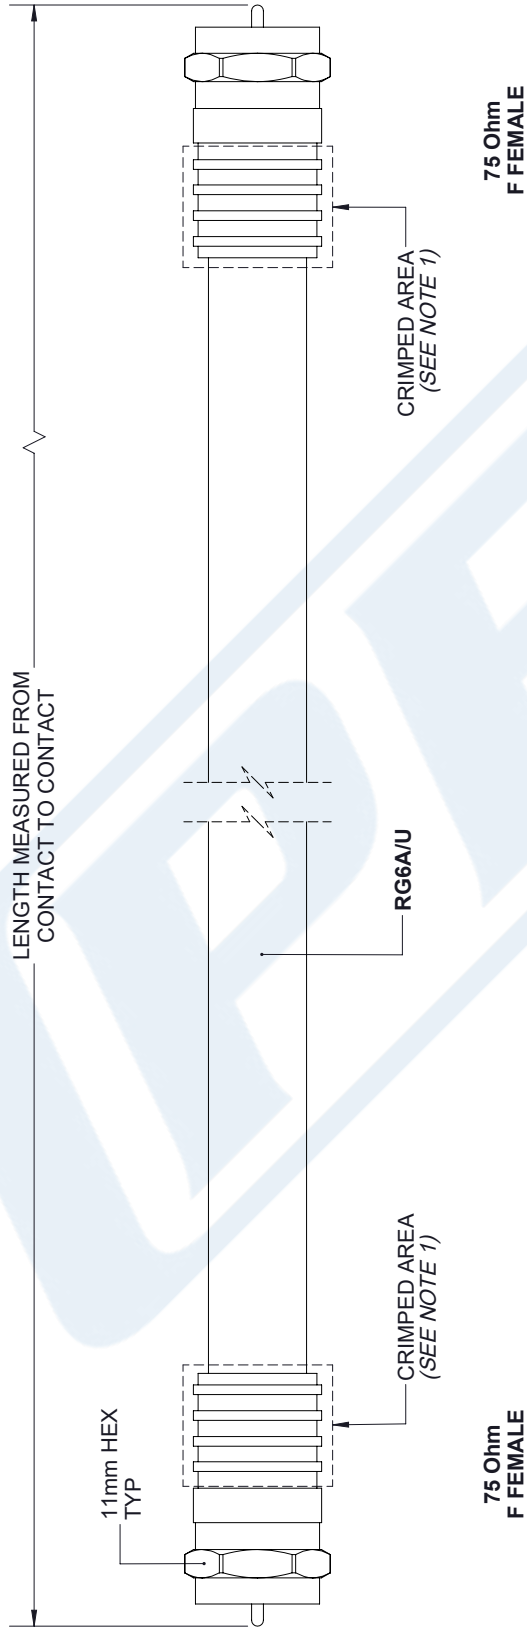

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table style="font-size: small;"> <tr> <td>.X = ± .2</td> <td>[.08]</td> <td>FRACTIONS</td> <td></td> </tr> <tr> <td>.XX = ± .02</td> <td>[.51]</td> <td></td> <td>± 1/32</td> </tr> <tr> <td>.XXX = ± .005</td> <td>[.13]</td> <td>ANGLES ± 1°</td> <td></td> </tr> </table> <p>CABLE LENGTH (L) TOLERANCES:</p> <table style="font-size: small;"> <tr> <td>L ≤ 12</td> <td>[305]</td> <td>= +1 [25] / -0</td> </tr> <tr> <td>12 [305] < L ≤ 60</td> <td>[1524]</td> <td>= +2 [51] / -0</td> </tr> <tr> <td>60 [1524] < L ≤ 120</td> <td>[3048]</td> <td>= +4 [102] / -0</td> </tr> <tr> <td>120 [3048] < L ≤ 300</td> <td>[7620]</td> <td>= +6 [152] / -0</td> </tr> <tr> <td>300 [7620] < L =</td> <td></td> <td>+5% L / -0</td> </tr> </table> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>	.X = ± .2	[.08]	FRACTIONS		.XX = ± .02	[.51]		± 1/32	.XXX = ± .005	[.13]	ANGLES ± 1°		L ≤ 12	[305]	= +1 [25] / -0	12 [305] < L ≤ 60	[1524]	= +2 [51] / -0	60 [1524] < L ≤ 120	[3048]	= +4 [102] / -0	120 [3048] < L ≤ 300	[7620]	= +6 [152] / -0	300 [7620] < L =		+5% L / -0	<p>PASTERNAK® an INFINIT® brand</p> <p>Pasternack Enterprises, Inc. P. O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com</p>	<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p>
.X = ± .2	[.08]	FRACTIONS																											
.XX = ± .02	[.51]		± 1/32																										
.XXX = ± .005	[.13]	ANGLES ± 1°																											
L ≤ 12	[305]	= +1 [25] / -0																											
12 [305] < L ≤ 60	[1524]	= +2 [51] / -0																											
60 [1524] < L ≤ 120	[3048]	= +4 [102] / -0																											
120 [3048] < L ≤ 300	[7620]	= +6 [152] / -0																											
300 [7620] < L =		+5% L / -0																											
SIZE A CAGE CODE A DRAWN BY 53919 ITEM NO. K.DANG	PE37163	REV A																											

NOTES:
1. CRIMP TOOL: .324 [8.23] HEX CRIMP TOOL.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.