

SHV plug clamp right angle for RG58,RG142,RG400,JBY195,LMR195

RF Connectors Technical Data Sheet





Configuration

- SHV Plug Connector
- MIL-STD-348B
- 50 Ohms

Features

• Max. Operating Frequency 300 MHz

- Right Angle Body Geometry
 Connector Interface Types: RG58, RG142, RG400
 7/46 last Lieu
- 7/16 Inch Hex

Gold over Nickel over copper Plated Brass Contact

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE45849 SHV plug right angle connector with clamp/solder attachment for RG58, RG142 and RG400 is part of our full line of RF components available for same-day shipping. Our SHV plug connector operates up to a maximum frequency of 300 MHz. Its right angle body geometry allows for easier connections in tight spaces.

Our SHV plug right angle connector PE45849 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Minimum	Typical	Maximum	Units
DC		300	MHz
		3,500	Vrms
		5,000	Vrms
		2	mOhms
		1.5	mOhms
5,000			MOhms
	DC	DC	DC 300 3,500 5,000 2 1.5

Mechanical Specifications

0.92 in [23.37 mm]
0.57 in [14.48 mm]
1.48 in [37.59 mm]
0.062 lbs [28.12 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SHV plug clamp right angle for RG58,RG142,RG400,JBY195,LMR195 PE45849

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com

© 2020 Pasternack Enterprises All Rights Reserved



SHV plug clamp right angle for RG58,RG142,RG400,JBY195,LMR195

RF Connectors Technical Data Sheet



PE45849

Material Specifications

Material	Plating
Brass	Gold over Nickel over copper
100	Tinned Copper
Teflon	
Brass	Tinned Copper
Brass	Tinned Copper
Silicon	
Brass	Tinned Copper
Brass	Tinned Copper BNC3200B-0058-9/W
	Brass Teflon Brass Brass Silicon Brass

Environmental Specifications

Temperature Operating Range Thermal Shock

-65 to +165 deg C MIL-STD-202, Method 107, Condition B

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

SHV plug clamp right angle for RG58,RG142,RG400,JBY195,LMR195 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SHV plug clamp right angle for RG58,RG142,RG400,JBY195,LMR195 PE45849


URL: https://www.pasternack.com/shv-plug-rg58-rg142-rg400-connector-pe45849-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com

PE45849 CAD Drawing

SHV plug clamp right angle for RG58,RG142,RG400,JBY195,LMR195

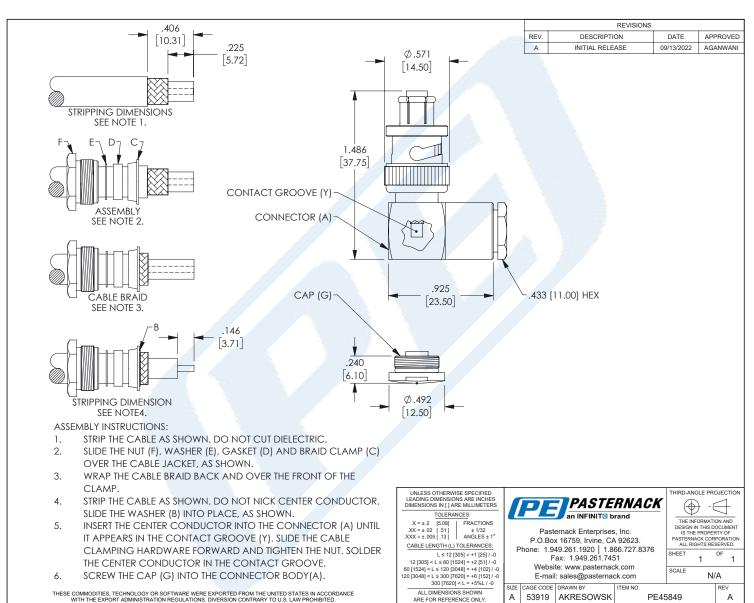

T-Rev.D