



# 1 Watt RF Load Up to 26.5 GHz with SMA Female Passivated Stainless Steel

## RF Terminations Technical Data Sheet

PE6079

### Features

- DC to 26.5 GHz Frequency Range
- VSWR 1.35:1 Max
- Max Power 1 Watt (CW)
- SMA Female Coaxial Interface

### Applications

- Wireless
- SatCom
- Radar Systems
- Test and Measurement
- Commercial and Military Communication

### Description

Pasternack's PE6079 is an RF termination (also called RF load or dummy load) that operates from DC to 26.5 GHz and handles up to 1 Watt (CW). Our SMA termination / load has a female gender. PE6079 SMA load termination offers 1.35:1 max VSWR.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
Impedance		50		Ohms
VSWR			1.35:1	
Input Power (CW) derated linearly to 0W at +125°C			1	Watts
Input Power (Peak) 5µs pulse, 0.05% duty cycle			1	KWatts

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 18	18 to 26.5				GHz
VSWR, Max	1.25:1	1.35:1				

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load Up to 26.5 GHz with SMA Female Passivated Stainless Steel PE6079](#)



1 Watt RF Load Up to 26.5 GHz with SMA  
Female Passivated Stainless Steel

## RF Terminations Technical Data Sheet

PE6079

### Mechanical Specifications

**Size**

Length	0.54 in [13.72 mm]
Width	0.25 in [6.35 mm]
Weight	0.006 lbs [2.72 g]

**Configuration**

Connector	SMA Female
Connector Specification	MIL-STD-348
Hex Size	1/4 inch

### Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold
Body	Passivated Stainless Steel	
Housing	Passivated Stainless Steel	

### Environmental Specifications

**Temperature**

Operating Range	-65 to +125 deg C
-----------------	-------------------

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load Up to 26.5 GHz with SMA Female Passivated Stainless Steel PE6079](#)



## 1 Watt RF Load Up to 26.5 GHz with SMA Female Passivated Stainless Steel

### RF Terminations Technical Data Sheet

PE6079

1 Watt RF Load Up to 26.5 GHz with SMA Female Passivated Stainless Steel from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1 Watt RF Load Up to 26.5 GHz with SMA Female Passivated Stainless Steel PE6079](https://www.pasternack.com/1-watts-sma-female-rf-load-up-to-26.5-ghz-precision-pe6079-p.aspx)

URL: <https://www.pasternack.com/1-watts-sma-female-rf-load-up-to-26.5-ghz-precision-pe6079-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE6079 CAD Drawing

1 Watt RF Load Up to 26.5 GHz with SMA Female Passivated Stainless Steel

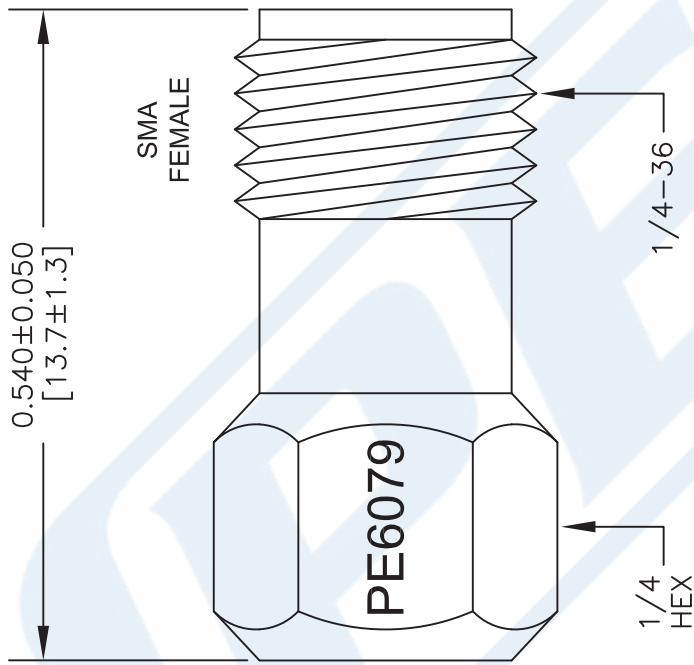

**STANDARD TOLERANCES**

DECIMAL ±0.01  
 .XX ±0.005  
 .XXX ±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

**(PE) PASTERNAK®**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE

**PE6079**

CAGE CODE 53919

CAD FILE 022217

SCALE N/A

SIZE A

2233

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].