



10 Watt RF Load Up to 6 GHz With N Male Input
IP68 Rated Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6185

Features

- DC to 6 GHz Frequency Range
- VSWR 1.15:1 Max
- Max Power 10 Watt (CW)
- N Male Coaxial Interface
- IP68 Rated

Applications

- Wireless
- Radar Systems
- Test and Measurement
- Commercial and Military Communication
- SatCom

Description

Pasternack's PE6185 is an RF termination (also called RF load or dummy load) that operates from DC to 6 GHz and handles up to 10 Watt (CW). Our N termination / load has a male gender. PE6185 N load termination offers 1.15:1 max VSWR. This Pasternack 10W N terminator has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Impedance		50		Ohms
VSWR			1.15:1	
Input Power (CW) derated linearly to 1W at +125°C			10	Watts
Input Power (Peak) 0.2% duty cycle			1	KWatts

Mechanical Specifications

Size	
Length	2.01 in [51.05 mm]
Width	1.1 in [27.94 mm]
Weight	0.1 lbs [45.36 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 Watt RF Load Up to 6 GHz With N Male Input IP68 Rated Black Anodized Aluminum Heatsink PE6185](#)



10 Watt RF Load Up to 6 GHz With N Male Input
IP68 Rated Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6185

Configuration

Connector

N Male

Material Specifications

Description	Material	Plating
Connector 1 Contact	Brass	Gold
Insulation	PTFE	
Outer Conductor	Brass	Tri-Metal
Body	Brass	Tri-Metal
Coupling Nut	Brass	Tri-Metal
Housing	Black Anodized Aluminum Heatsink	

Environmental Specifications

Temperature

Operating Range

-40 to +120 deg C

Ingress Protection (IP) Rating

IP68 (mated condition)

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 Watt RF Load Up to 6 GHz With N Male Input IP68 Rated Black Anodized Aluminum Heatsink PE6185](#)



10 Watt RF Load Up to 6 GHz With N Male Input IP68 Rated Black Anodized Aluminum Heatsink

RF Terminations Technical Data Sheet

PE6185

10 Watt RF Load Up to 6 GHz With N Male Input IP68 Rated Black Anodized Aluminum Heatsink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 Watt RF Load Up to 6 GHz With N Male Input IP68 Rated Black Anodized Aluminum Heatsink PE6185](http://www.pasternack.com/10-watts-n-male-rf-load-up-to-6-ghz-pe6185-p.aspx)

URL: <http://www.pasternack.com/10-watts-n-male-rf-load-up-to-6-ghz-pe6185-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6185 CAD Drawing

10 Watt RF Load Up to 6 GHz With N Male Input IP68 Rated
Black Anodized Aluminum Heatsink

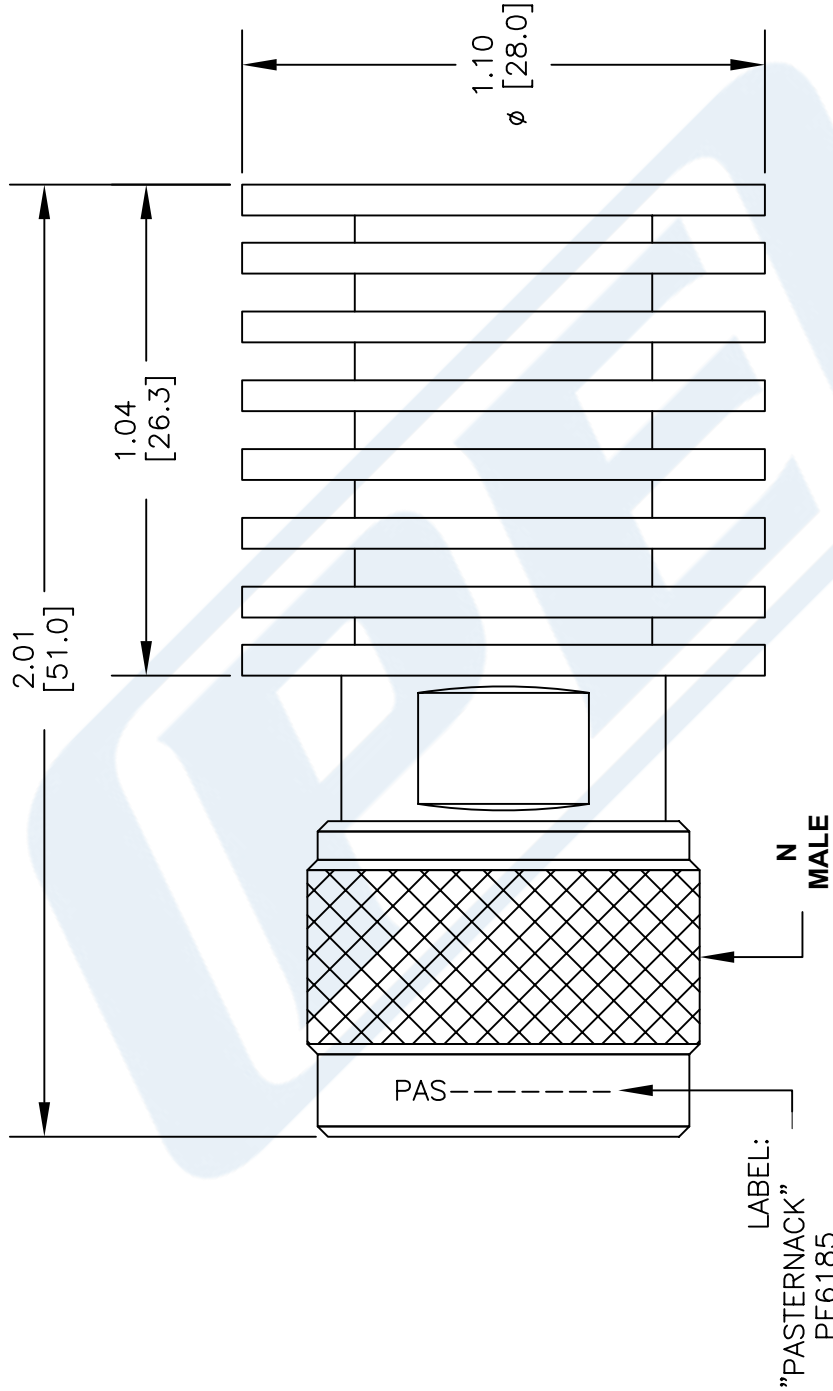

STANDARD TOLERANCES
 DECIMAL ±0.20
 .XX ±0.10
 .XXX ±0.10

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE6185

FSCM NO. 53919

CAD FILE 052616

SCALE N/A

SIZE A

3045

PE PASTERNAK®
 THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com