



50 Watt RF Load Up to 3 GHz With SMA Female Input Square Body Nickel Plated Brass

RF Terminations Technical Data Sheet

PE6232

Features

- DC to 3 GHz Frequency Range
- VSWR 1.25:1 Max
- Max Power 50 Watt (CW)
- SMA Female Coaxial Interface

Applications

- Wireless
- Radar Systems
- Commercial and Military Communication
- SatCom
- Test and Measurement

Description

Pasternack's PE6232 is an RF termination (also called RF load or dummy load) that operates from DC to 3 GHz and handles up to 50 Watt (CW). Our SMA termination / load has a female gender. PE6232 SMA load termination offers 1.25:1 max VSWR. RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
Impedance		50		Ohms
VSWR			1.25:1	
Input Power (CW) derated linearly to 5W at +125°C			50	Watts
Input Power (Peak) 5µs pulse, 3% duty cycle			1	KWatts

Mechanical Specifications

Size	
Length	1.26 in [32 mm]
Width	1.5 in [38.1 mm]
Height	0.69 in [17.53 mm]
Weight	0.066 lbs [29.94 g]

Configuration

Connector	SMA Female
-----------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Watt RF Load Up to 3 GHz With SMA Female Input Square Body Nickel Plated Brass PE6232](#)



50 Watt RF Load Up to 3 GHz With SMA
Female Input Square Body Nickel Plated Brass

RF Terminations Technical Data Sheet

PE6232

Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold
Body	Brass	Gold
Housing	Brass	Nickel

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant


REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

Typical Performance Data

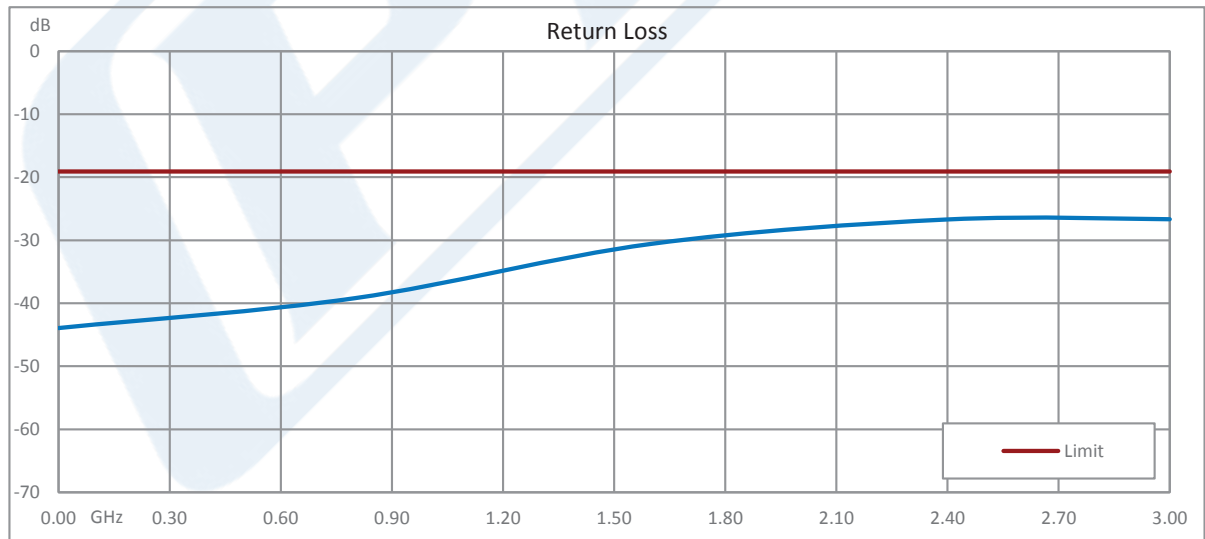

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Watt RF Load Up to 3 GHz With SMA Female Input Square Body Nickel Plated Brass PE6232](#)



50 Watt RF Load Up to 3 GHz With SMA Female Input Square Body Nickel Plated Brass

RF Terminations Technical Data Sheet

PE6232

50 Watt RF Load Up to 3 GHz With SMA Female Input Square Body Nickel Plated Brass from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Watt RF Load Up to 3 GHz With SMA Female Input Square Body Nickel Plated Brass PE6232](http://www.pasternack.com/50-watts-sma-female-rf-load-up-to-3-ghz-pe6232-p.aspx)

URL: <http://www.pasternack.com/50-watts-sma-female-rf-load-up-to-3-ghz-pe6232-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6232 CAD Drawing

50 Watt RF Load Up to 3 GHz With SMA Female Input Square Body Nickel Plated Brass

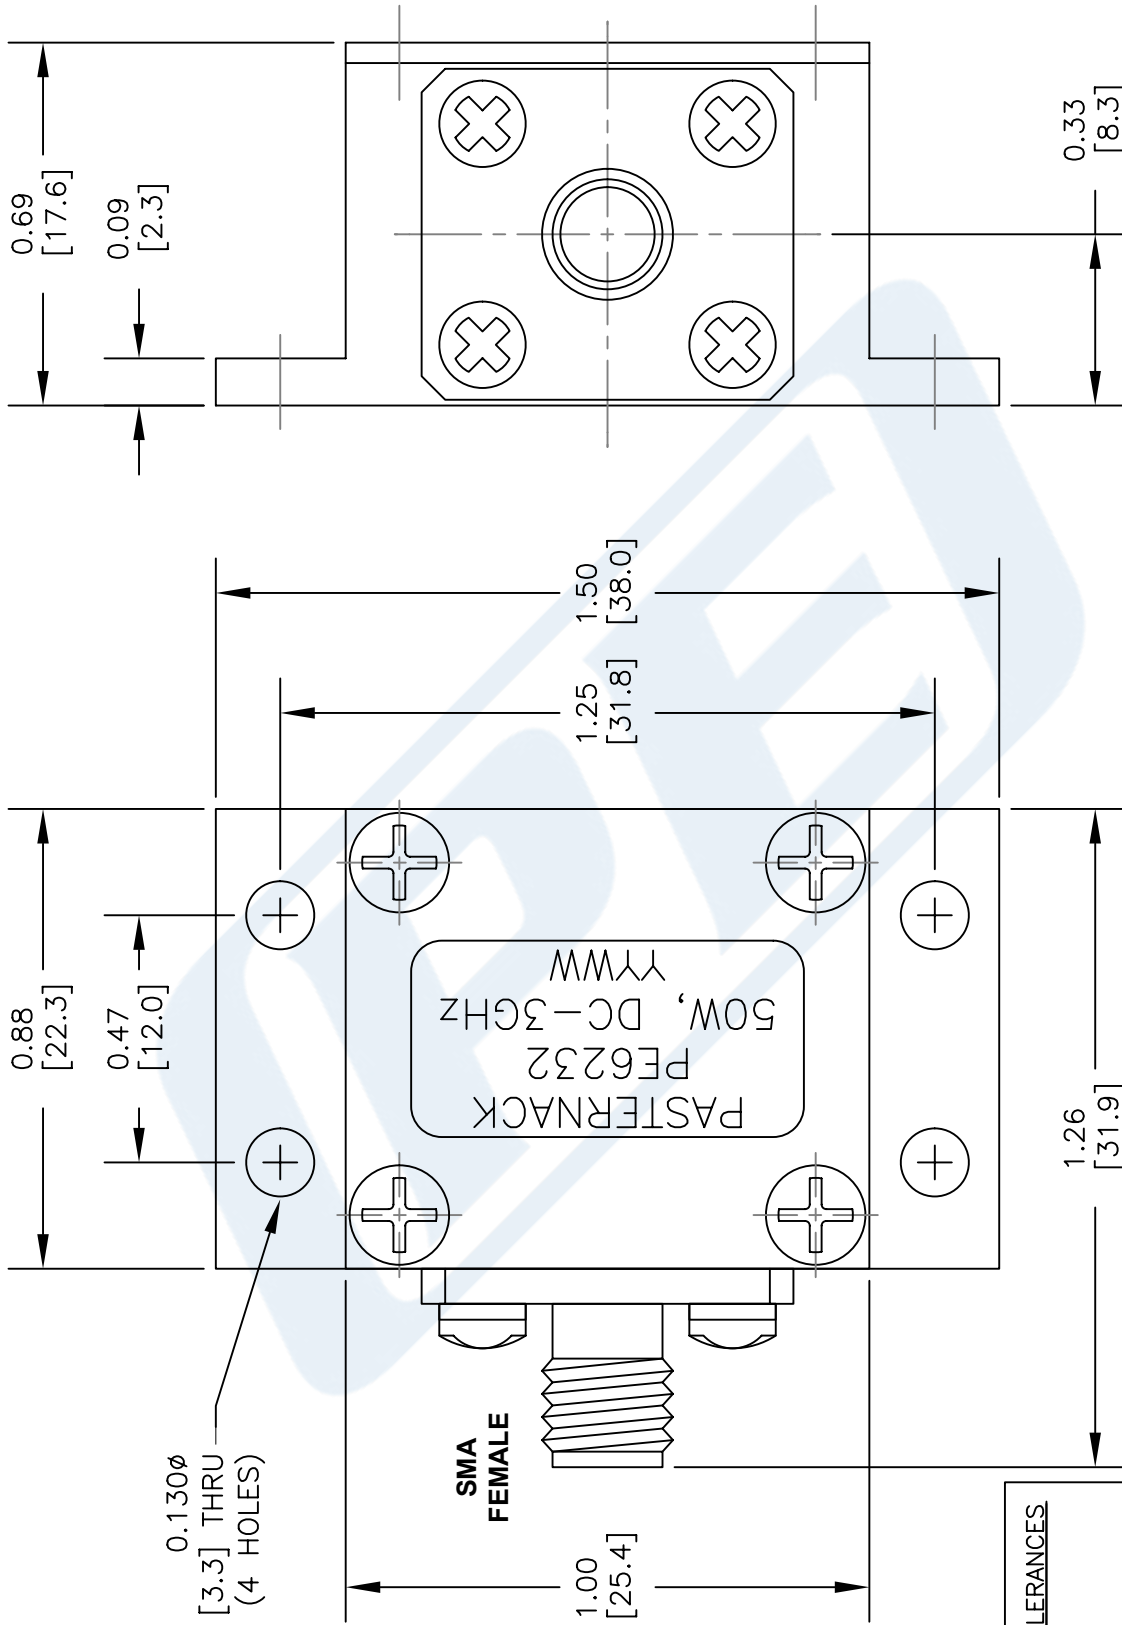

PASTERNAK
PE6232
50W, DC-3GHz
YYWW

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE6232

PE PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 052616 SCALE N/A SIZE A 3045