



SPDT 0.03 dB Low Insertion Loss Repeatability  
 Electromechanical Relay Latching Switch, DC to  
 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA

## Electromechanical Relay Switches Technical Data Sheet

PE71S6335

### Features

- DC to 20 GHz SPDT Switch
- Guaranteed Low Insertion loss Repeatability: 0.03 dB max over 10 Million Lifecycles
- Insertion Loss: 0.5 dB max
- Isolation: up to 65 dB min
- +24 Vdc Nominal Voltage
- Hot Switching: 1W CW max
- Latching Self Cutoff Actuator
- Position Indicators
- Guaranteed to meet MIL-STD-202 Environmental Conditions
- SMA connectors
- -25°C to +75°C Operating Temperature
- 5 Million Lifecycles Minimum

### Applications

- Electronic Warfare
- Electronic Countermeasures
- Microwave Radio
- VSAT
- Radar
- Space Systems
- Test Instrumentation
- Research and Development
- Signal Monitoring Devices

### Description

The PE71S6335 is a single pole double throw (SPDT) electromechanical switch that operates across a wide frequency range from DC to 20 GHz and has guaranteed insertion loss repeatability of 0.03 dB max over a life span of 10 million switching cycles in a Break Before Make condition. Maximum Insertion loss is 0.5 dB and Isolation is rated up to 65 dB minimum. The model also supports a hot switching limit of up to 1W CW maximum. The Latching Self Cut-Off actuator design includes indicators, a +24 Vdc operating voltage, and operates over a temperature range of -25°C to +75°C. The rugged and compact package assembly supports SMA connectors and solder pins for command control capability. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions that include temperature cycle, vibration, and shock.

### Electrical Specifications

Switch Type	SPDT, Reflective
Actuator Type	Latching
Switching Sequence	Break Before Make
Actuator Options	Indicators, Self Cut Off
Polarity	Positive Common

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		20	GHz
Impedance		50		Ohms
Operating Voltage	20	24	32	Volts
Actuating Current @ 24 Volts		68		mA
Insertion Loss			0.5	dB
Insertion Loss Repeatability			0.03	dB
Coil Resistance		350		Ohms
Third Order Intermodulation		-120		dBc
Input Power (CW)			1	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SPDT 0.03 dB Low Insertion Loss Repeatability Electromechanical Relay Latching Switch, DC to 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA PE71S6335](#)



SPDT 0.03 dB Low Insertion Loss Repeatability  
 Electromechanical Relay Latching Switch, DC to  
 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA

## Electromechanical Relay Switches Technical Data

PE71S6335

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12.4	12.4 to 20			GHz
VSWR, Max	1.15:1	1.25:1	1.3:1			
Insertion Loss, Max	0.3	0.4	0.5			dB
Isolation, Min	85	75	65			dB

#### Electrical Specification Notes:

Insertion Loss Repeatability at 25° is 0.03 dB

### Mechanical Specifications

#### Size

Length 1.25 in [31.75 mm]  
 Width/Diameter 1.25 in [31.75 mm]  
 Height 0.5 in [12.7 mm]

Weight 0.108 lbs [48.99 g]  
 Body Material and Plating Aluminum, Nickel  
 Package Type Connectorized  
 Operating Life 10,000,000 Cycles  
 Switching Time 15 ms Max

#### Connectors

RF Connector Type SMA Female  
 RF Connector Contact Material and Plating Beryllium Copper, Gold  
 RF Connector Body Material and Plating Passivated Stainless Steel  
 Control Connector Solder Pin

### Environmental Specifications

#### Temperature

Operating Range -25 to +75 deg C  
 Storage Range -55 to +85 deg C

Humidity 15 to 95% relative humidity  
 Shock 50g / 11 ms, sawtooth  
 Sine Vibration 10-2000 Hz, 20g  
 Random Vibration 16.91g (rms) 50-2000 Hz, 3 min/axis  
 Altitude 15000 ft

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SPDT 0.03 dB Low Insertion Loss Repeatability Electromechanical Relay Latching Switch, DC to 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA PE71S6335](#)



SPDT 0.03 dB Low Insertion Loss Repeatability  
Electromechanical Relay Latching Switch, DC to  
20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA

## Electromechanical Relay Switches Technical Data

PE71S6335

Temperature Cycling  
ESD Sensitivity

-55 to +85 (10 Cycles)  
ESD Sensitive Material, Transport material in Approved  
ESD bags. Handle only in ESD Workstation.




**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

#### Typical Performance Data

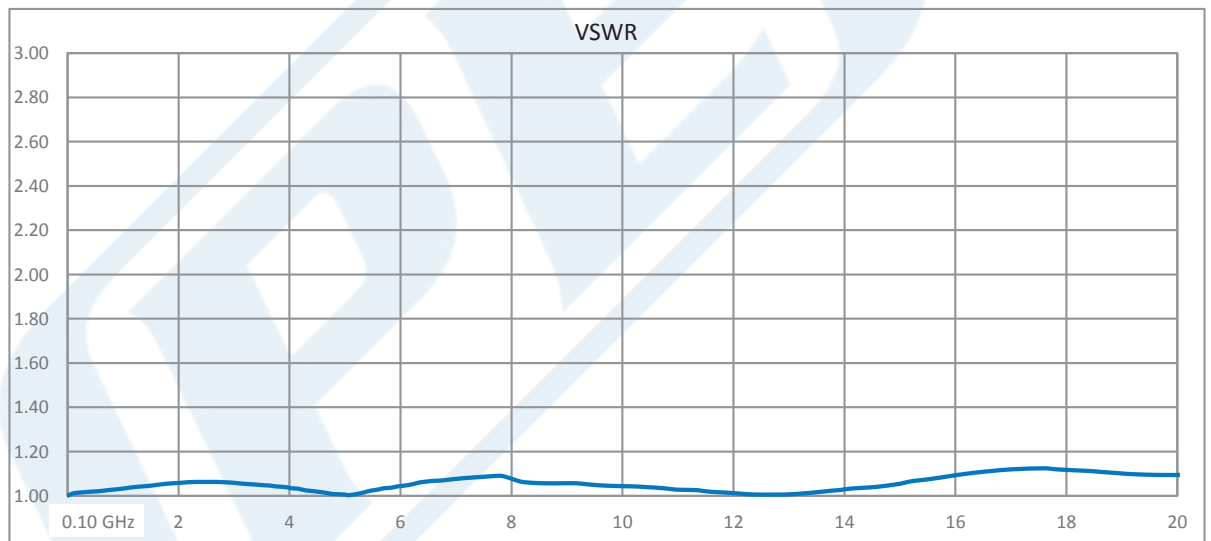


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SPDT 0.03 dB Low Insertion Loss Repeatability Electromechanical Relay Latching Switch, DC to 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA PE71S6335](#)



SPDT 0.03 dB Low Insertion Loss Repeatability  
Electromechanical Relay Latching Switch, DC to  
20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA

## Electromechanical Relay Switches Technical Data

PE71S6335

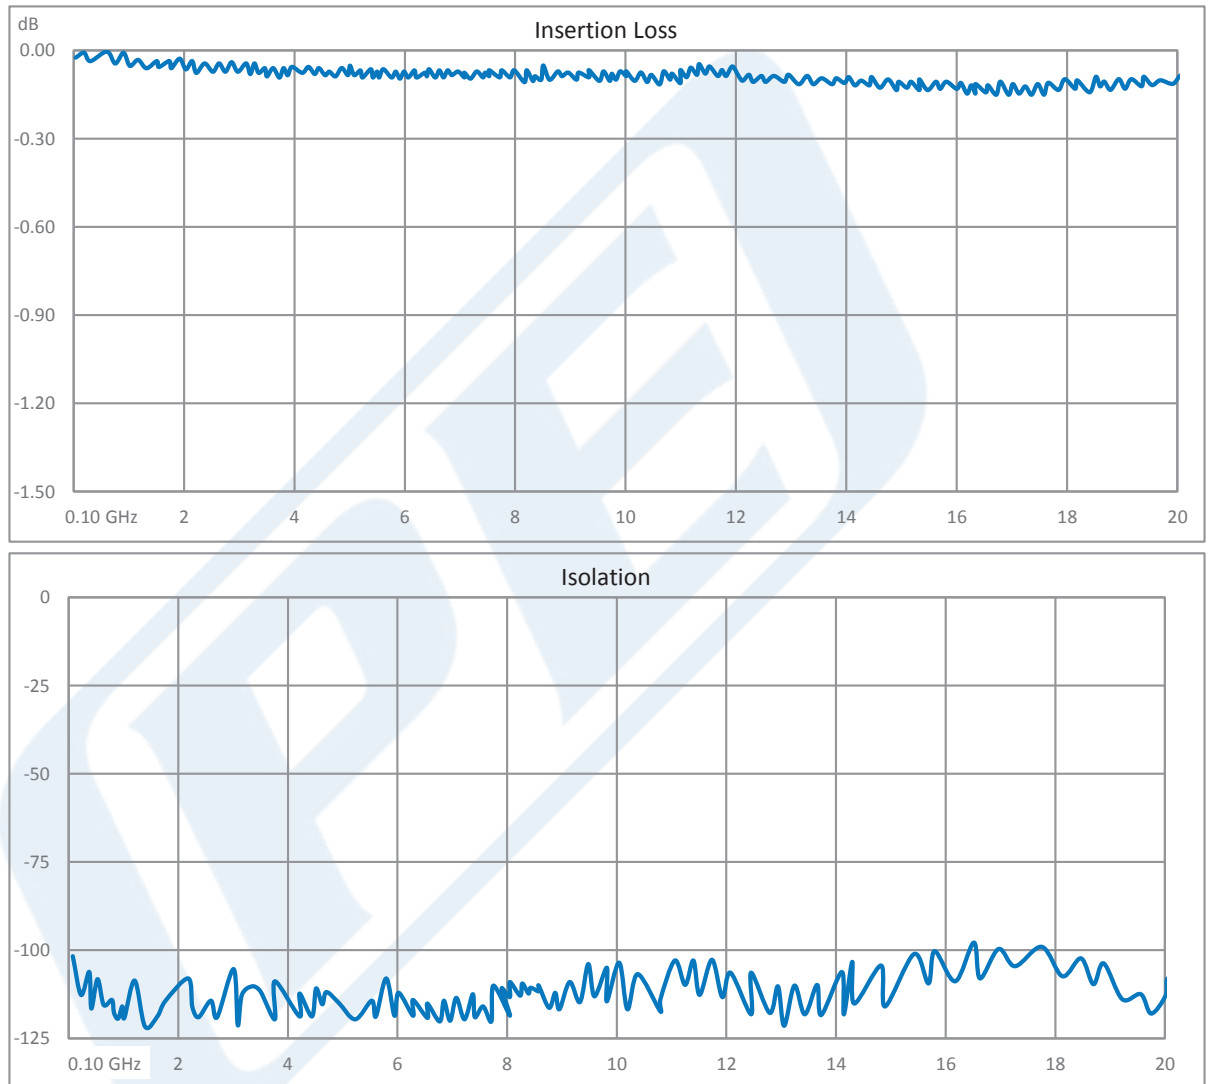

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SPDT 0.03 dB Low Insertion Loss Repeatability Electromechanical Relay Latching Switch, DC to 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA PE71S6335](#)



SPDT 0.03 dB Low Insertion Loss Repeatability  
Electromechanical Relay Latching Switch, DC to  
20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA


## Electromechanical Relay Switches Technical Data

PE71S6335

### POWER RATING CHART


This graph is based on the following conditions :

- Ambient temperature : + 25°C
- Sea level
- V.S.W.R. : 1 and cold switching

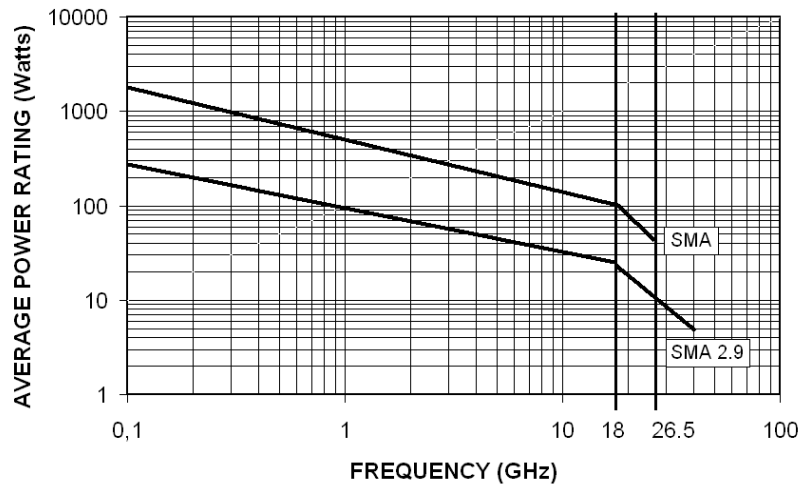

### DERATING FACTOR VERSUS V.S.W.R.

The average power input must be reduced for load V.S.W.R. above 1.

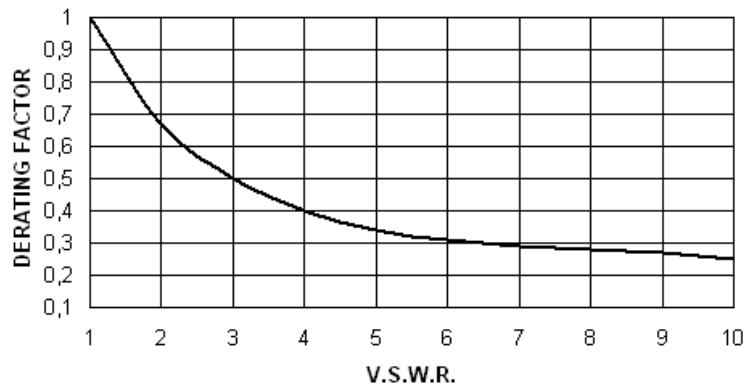

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SPDT 0.03 dB Low Insertion Loss Repeatability Electromechanical Relay Latching Switch, DC to 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA PE71S6335](#)



SPDT 0.03 dB Low Insertion Loss Repeatability  
Electromechanical Relay Latching Switch, DC to  
20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA

## Electromechanical Relay Switches Technical Data

PE71S6335

SPDT 0.03 dB Low Insertion Loss Repeatability Electromechanical Relay Latching Switch, DC to 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SPDT 0.03 dB Low Insertion Loss Repeatability Electromechanical Relay Latching Switch, DC to 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA PE71S6335](https://www.pasternack.com/sma-spdt-electromechanical-relay-latching-switch-indicators-self-cut-off-pe71s6335-p.aspx)

URL: <https://www.pasternack.com/sma-spdt-electromechanical-relay-latching-switch-indicators-self-cut-off-pe71s6335-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE71S6335 CAD Drawing

SPDT 0.03 dB Low Insertion Loss Repeatability Electromechanical Relay  
Latching Switch, DC to 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA

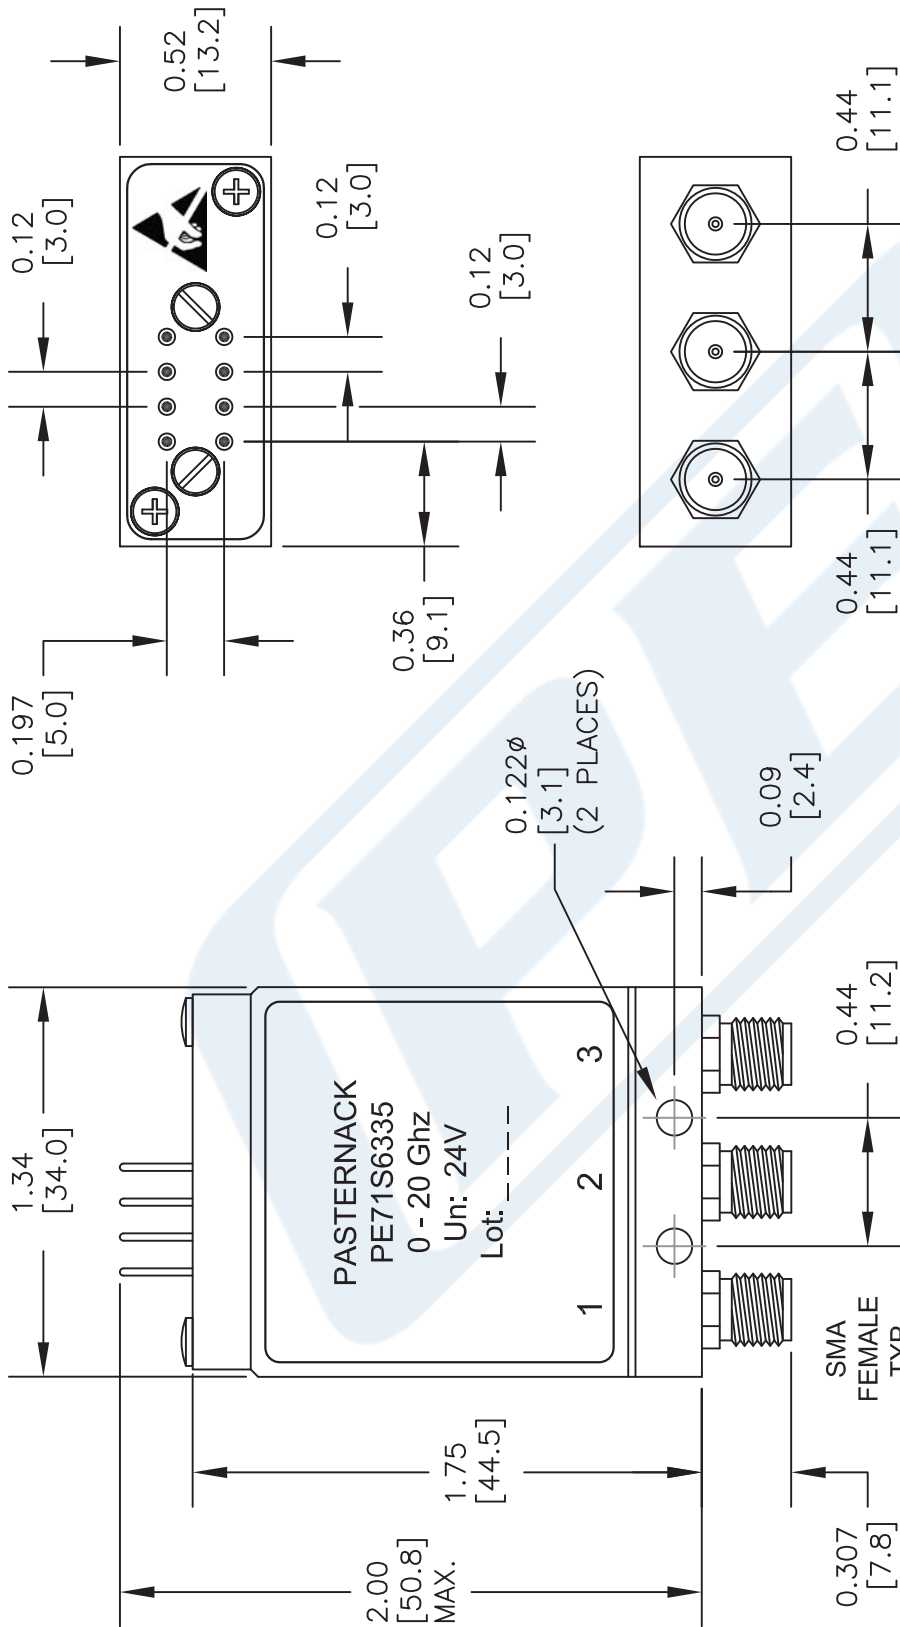



STANDARD TOLERANCES  
DECIMAL ±0.02

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

<p>DWG TITLE</p> <h2>PE71S6335</h2>		<p>NOTES:</p> <ol style="list-style-type: none"> <li>UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.</li> <li>ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.</li> <li>DIMENSIONS ARE IN INCHES [mm].</li> </ol>	
<p>PASTERNAK® THE ENGINEER'S RF SOURCE</p> <p>Pasternack Enterprises, Inc. P.O. Box 16759   Irvine   CA   92623</p> <p>Phone: (949) 261-1920   Fax: (949) 261-7451 Website: www.pasternack.com   E-Mail: sales@pasternack.com</p>		<p>CAGE CODE</p> <p>53919</p>	<p>CAD FILE</p> <p>022717</p>
<p>SCALE</p> <p>N/A</p>		<p>SIZE</p> <p>A</p>	<p>2233</p>

# PE71S6335 CAD Drawing

SPDT 0.03 dB Low Insertion Loss Repeatability Electromechanical Relay Latching Switch, DC to 20 GHz, 1W, 24V, Indicators, Self Cut Off, SMA

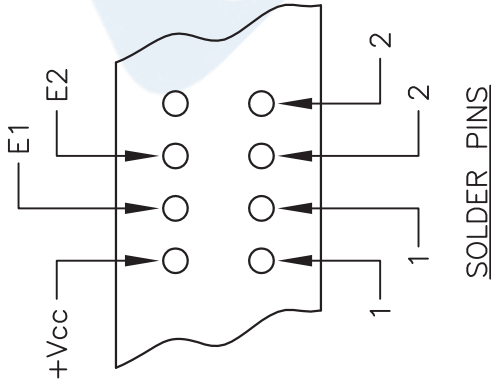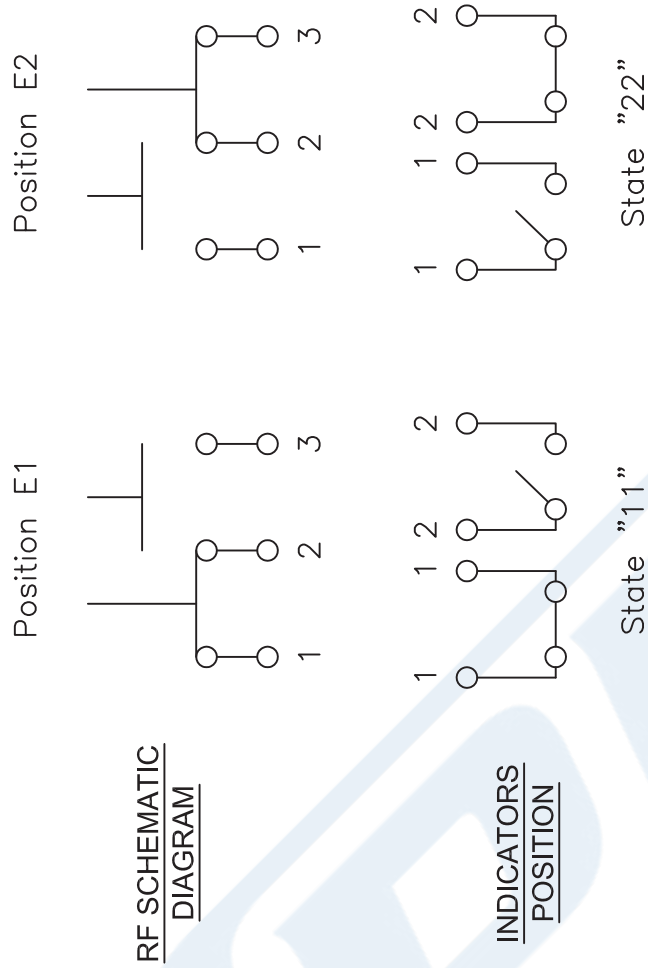

### Standard drive option "1" (Positive common):

- Connect pin +Vcc to supply
- Select desired RF path by applying ground to the corresponding "Close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open).
- To open desired path and close the new RF path, connect ground to the corresponding "Close" pin (Ex: ground pin E2 to open RF path 1-2 and close RF path 2-3).

STANDARD TOLERANCES  
DECIMAL  
±0.02

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



**PASTERNAK**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

**PE71S6335**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 022717

SCALE N/A

SIZE A

2233