

## WR-62 Waveguide Shim, UG-Cover Square Flange, 1mm Brass

### Waveguide Accessories Technical Data Sheet

**PEW62FS1**

#### Features

- WR-62 Waveguide Shim
- Square UG-Cover Flange Configuration
- Frequency Range: 11.9 GHz to 18 GHz
- 1 mm Thick Brass Construction

#### Description

PEW62FS1 is a WR-62 waveguide shim with operating frequency range from 11.9 GHz to 18 GHz. This waveguide shim is fabricated with 1 mm thick brass by high precision manufacturing process. PEW62FS1 can be used to bridge gaps between WR-62 waveguide components with UG-Cover Square flanges. Pasternack offers wide selection of waveguide components with high performance available in stock and same-day shipping to customers worldwide.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	11.9		18	GHz

#### Mechanical Specifications

Body Material	Brass
Body Finish	Passivation
Length	0.039 in [0.99 mm]
Width	1.311 in [33.3 mm]
Height	1.311 in [33.3 mm]
Weight	0.661 lbs [299.82 g]

#### Compliance Certifications (see [product page](#) for current document)

WR-62 Waveguide Shim, UG-Cover Square Flange, 1mm Brass from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-62 Waveguide Shim, UG-Cover Square Flange, 1mm Brass PEW62FS1](#)



URL: <https://www.pasternack.com/wr-62-waveguide-shim-1-mm-copper-ug-cover-square-pew62fs1-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PEW62FS1 CAD Drawing

WR-62 Waveguide Shim, UG-Cover Square Flange, 1mm Brass

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	4/11/2022
		APPROVED
		S. PONG

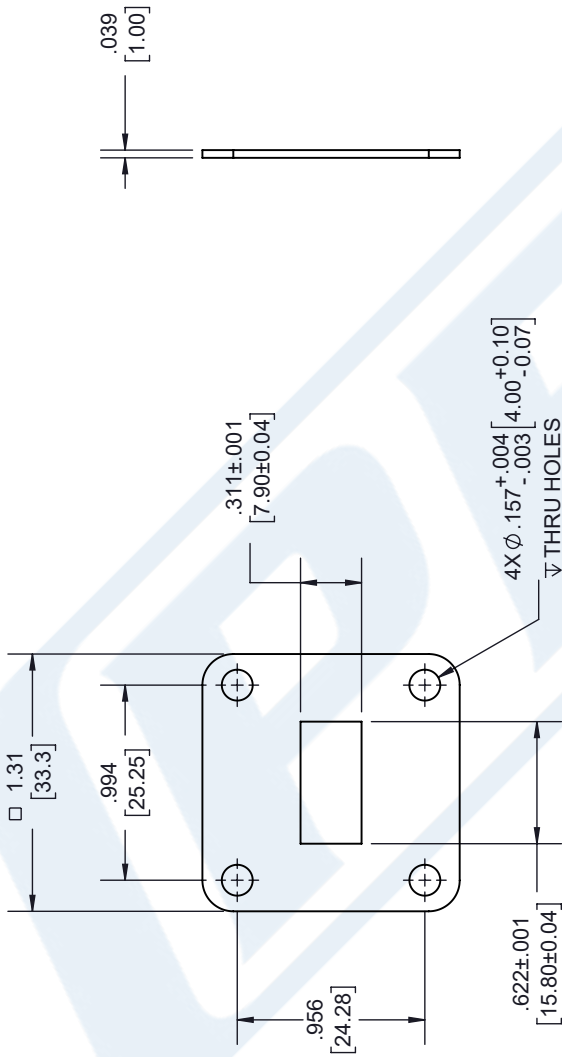

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:  
 .X = ±.2 [5.08] FRACTIONS ± 1/32  
 .XX = ±.02 [51] ANGLES ± 1°  
 .XXX = ±.005 [13]  
 CABLE LENGTH (L), TOLERANCES:  
 L ≤ 12 [305] = +1 [25] / -0  
 12 [305] < L ≤ 60 [1524] = +2 [51] / -0  
 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0  
 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0  
 300 [7620] < L = +5% / -0

ALL DIMENSIONS SHOWN  
ARE FOR REFERENCE ONLY.

**PE PASTERNAK®**  
an INFINITE® brand

Pasternack Enterprises, Inc.  
P. O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
Website: www.pasternack.com  
E-mail: sales@pasternack.com

SIZE A CAGE CODE 53919 DRAWN BY K.DANG ITEM NO. PEW62FS1

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

REV A